



WARRANTY AND LIMITATION OF LIABILITY AGREEMENT CASE CONSTRUCTION EQUIPMENT

The Case Warranty

The Case Warranty is a limited warranty that is provided to the initial retail purchaser in return for consideration paid as part of the purchase price of the product. The selling dealer must review the warranty coverage with the initial retail purchaser and obtain signature on this document.

New Limited Warranty

The warranty described here is from CNH Industrial America LLC and in Canada, CNH Industrial Canada Ltd., both of which are referred to in this agreement as "Case". This warranty is for Case products sold and registered in the United States or Canada and normally operated in the United States or Canada. This warranty does NOT apply to any product normally operated outside of the United States and/or Canada, or to any unit purchased outside of the United States or Canada and imported in for any reason other than a customer relocation/personal move.

Warranty Period

For the products listed below, the Warranty Period for all coverage begins at the time that any person, dealer or agent first places the unit into service. At the latest, a unit is considered to be placed into service when purchased or delivered to an initial retail purchaser. Certain demonstration, rental, lease, and other used units may be eligible for a portion of a new unit warranty. The availability of the remaining portion of a new unit warranty does not mean that a unit is new or unused. The Warranty Period ends when either the month or machine hour limit is reached, whichever limit occurs first.

Table with 2 columns: PRODUCT and WARRANTY COVERAGE. Rows include SKID STEER / COMPACT TRACK LOADERS, LOADER BACKHOES - N SERIES, TRACTOR LOADERS / FORKLIFTS, COMPACT EXCAVATORS CX-B SERIES, COMPACT EXCAVATOR CX-C SERIES, COMPACT WHEEL LOADERS, COMPACTION EQUIPMENT - SINGLE OR DOUBLE DRUM, TELESCOPIC HANDLERS, WHEEL LOADERS, MOTOR GRADERS, EXCAVATORS, and CRAWLER DOZERS.

- 1) Engine coverage is provided directly by the engine manufacturer.
2) Torque converter, transmission, drive shafts, & drive axles are covered for 24 months / 2000 hours.
3) Warranty does not cover any configuration excavator equipped with feller buncher/accumulator attachments.
4) Units equipped with factory standard telematics are authorized for Case ProCare extended coverage for an additional 24 months / 3000 total machine hours, whichever comes first.
5) Engine warranty coverage is provided through CNH Industrial.

Operator's Manual / Warranty Receipt Verification

The selling dealer has reviewed the correct operator's manual with me and will provide upon delivery of the product. YES [] / NO []

The selling dealer explained safety precautions to me. YES [] / NO []

The selling dealer explained the warranty terms and coverage to me. YES [] / NO []

The selling dealer explained Purchased Protection Plan options for additional coverage on select components. YES [] / NO []

I wish to be part of future Case communications, offers or events. YES [] / NO []

Form with fields for Model, Serial Number, Retail DATE / HOURS, Operator Manual Number, Purchaser Name, Dealer Name, Address, City / State, Zip code, and Phone Number. Dealer Name: OCT EQUIPMENT, LLC; Address: 12210 E. FIRST ST.; City / State: TULSA, OK; Zip code: 74128; Phone Number: 918-437-5085.

The answers checked above are correct. I acknowledge that I have read and I accept this warranty policy statement.

Purchaser Signature _____ Date _____

Dealer Signature _____ Date _____

USA mail original to CNH Industrial Capital America LLC, Attn: WLL Agreement, PO Box 3700, Lancaster, PA 17604-3700 USA
Overnight courier mail original to CNH Industrial Capital America LLC, Attn: WLL Agreement, 500 Diller Ave., New Holland, PA 17557
Canada mail original to CNH Industrial Capital America LLC, Attn: WLL Agreement, 4475 North Service Rd, Suite 301, Burlington, ON L7L4X7 Canada

Case is a registered trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates

Original - CNH

Copy 2 - Purchaser

Copy 3 - Dealer

What's Covered

If a defect in material or workmanship is found in a unit and reported during the Warranty Period, Case will pay parts and labor costs to repair the defect if the services are performed by an authorized Case dealer at the dealer's location. If parts are needed during the repair, Case will, at its option, use genuine Case new or remanufactured parts. Case replacement parts that are used in a warranty repair are warranted until the end of the machine warranty or to the end of the Case Replacement Parts Warranty, whichever is longer.

CASE PROVIDES NO WARRANTY, EXPRESS OR IMPLIED, FOR A COMPONENT OR OTHER ITEM THAT IS SEPARATELY WARRANTED TO THE PURCHASER BY ITS MANUFACTURER, SUCH AS TIRES, BATTERIES AND FUEL INJECTION COMPONENTS. CHECK WITH YOUR DEALER FOR DETAILS

No Modification or Extension of Warranty Period

The Case Warranty is limited to the written terms in this document. Case does not authorize any person, dealer or agent to change or extend the terms of this warranty in any manner. Any assistance to the purchaser in the repair or operation of any Case product outside the terms or limitations or exclusions of this warranty will not constitute a waiver of the terms, limitations or exclusions of this warranty, nor will such assistance extend or re-establish the warranty.

EXCLUSIVE REMEDY

THE REMEDY OF REPAIRING A DEFECT IN MATERIALS OR WORKMANSHIP AT A CASE DEALERSHIP UNDER THE TERMS OF THIS WARRANTY IS THE PURCHASER'S EXCLUSIVE REMEDY AND IS IN LIEU OF ANY OTHER REMEDY OTHERWISE AVAILABLE.

This Warranty is Void If

The unit's hour meter is changed or altered, unless a Case dealer, at the direction of Case, changed the meter. If the unit is used in an application for which it is not designed or the unit has been scrapped, salvaged, stolen, junked or totaled.

Limitation and Exclusions The Case Warranty gives you specific legal rights and you may also have other rights, which vary, from region to region.

THIS DOCUMENT CONTAINS THE ENTIRE CASE WARRANTY. CASE MAKES NO OTHER REPRESENTATIONS OR WARRANTIES, EXPRESSED OR IMPLIED, AND SPECIFICALLY EXCLUDES THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE.* CASE WILL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM A BREACH OF THE WRITTEN WARRANTY OR ANY IMPLIED WARRANTY IMPOSED BY LAW.*

Owner's Responsibility

The Case warranty remains in effect during the Warranty Period if the owner performs the required maintenance at the recommended intervals outlined in the product operator's manual and the unit is operated within its rated capacity. Genuine Case service parts or Case approved service parts that meet Case specifications must be used for maintenance and repair.

What's Not Covered

- Cost associated with performing pre-delivery or scheduled inspection service.
- Repairs arising from storage deterioration, failure to maintain the equipment, negligence, alteration, improper use of the equipment, collision or other accident, vandalism, or other casualty, or operation beyond rated capacity or specification.
- Repairs arising from abuse or neglect, including but not limited to: operation without adequate coolant or lubricants, adjustments to the fuel system outside equipment specifications, over-speeding, improper storage, starting, warm-up, or shutdown practices, incorrect fuel or contaminated fuel, oil or other fluids.
- Normal maintenance services, such as engine tune-ups, engine fuel system cleaning, checks, adjustments, shimming, etc.
- Replacement of non-defective wear items expected to be replaced during the warranty period, including but not limited to: light bulbs, spark plugs, ignition points, brake or clutch linings, slip clutches, belts, chains, knives, bucket cutting edges and teeth, crawler track pads and track components, crop processing and cutting components, external drive sprockets and chains, soil engaging tools and accessories.
- Items replaced due to customer demand.
- Labor charges performed by anyone except a dealer authorized by contract to repair the equipment, unless they qualify under special provisions (i.e.; outside labor).
- Any and all travel costs for items such as towing, service calls, or transporting a unit to and from the place where the warranty service is performed, unless specifically covered by a product improvement program or units classified as heavy and/or compaction products
- Claims involving loss or damage during shipment or handling, including units subsequently sold as a "salvage" unit.
- "Salvage" or other units sold on an "as is" basis, unless otherwise specified in writing at the time of sale.
- Normal maintenance costs, including but not limited to: lubricants, coolants, fluids, fuel, filters, and associated labor. Lubricants, filters, and coolants may qualify for warranty reimbursement if they require replacement as a DIRECT RESULT of a defect in material or workmanship.
- Claims involving the inspection or reconditioning of units after storage or prior use.
- Components or items that are separately warranted directly by the manufacturer including but are not limited to: tires, tracks, engines, transmissions, batteries, fuel injection pumps, fuel injectors, etc.
- Shop comebacks: any duplicate, repeat, or comeback repair resulting from improper diagnosis, testing, or service work. This also includes repairs arising from service performed by agents not approved by Case.
- Repairs arising from any unauthorized modification to the product or the use on non-CNH Industrial parts, implements, or attachments, including but not limited to performance changing (i.e., increasing horsepower or other modifications) and/or emissions defeating modifications.
- Removal, replacement, or installation of non-CNH Industrial optional equipment, attachments or components.
- Premiums charged for overtime labor costs or out of shop expenses.
- Economic loss including lost profits, crop loss, equipment rental, or other expense.
- Unauthorized modification or updating machines without a warrantable failure based on Service Bulletin information or production changes.
- Any and all costs of special tools
- Any and all costs of dealer shop supplies incurred with repairs, including but not limited to: solvents, cleaners, anti-seize lubricants, loctite, sealant, adhesive, oil-dry, shop towels, etc. Sealant or adhesive may qualify for warranty reimbursement in certain applications requiring a large volume of sealant/ adhesive.
- Failure of the machine, its implements or attachments caused by improper field application or loading.
- Any and all costs for coolant, fuel, or lube (oil) analysis including supplies and lab recommendations.
- Cost of initial setup or installation of any optional equipment or attachments to a unit.
- Cost associated with cleaning of machine in preparation for servicing

USA mail original to CNH Industrial Capital America LLC, Attn: WLL Agreement, PO Box 3700, Lancaster, PA 17604-3700 USA
Overnight courier mail original to CNH Industrial Capital America LLC, Attn: WLL Agreement, 500 Diller Ave., New Holland, PA 17557
Canada mail original to CNH Industrial Capital America LLC, Attn: WLL Agreement, 4475 North Service Rd, Suite 301, Burlington, ON L7L4X7 Canada

Case is a registered trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates

Original – CNH

Copy 2 – Purchaser

Copy 3 – Dealer

CASE
CONSTRUCTION

Asphalt Compactors

DV AND PT SERIES



DV23 / DV26 / DV36 / DV45 / DV207 / DV209D / DV210D / DV213 / PT240
DV23CC / DV26CC / DV45CC / DV209CD / DV210CD

SINCE 1842



DV23+



DV26+



DV36



DV45+



DV207**



DV209D*



DV210D*



DV213**



PT240**

*Combination roller option available

**Model available in Canada only



Flat-Out Amazing

Easy to operate, easy to maintain and easy on the operator, CASE asphalt compaction equipment is built for the daily grind without the daily grief. With dual-drum drive technology, high vibration frequencies up to 67 Hz, impressive maneuverability and standard features you won't find elsewhere, these easy machines are hard to beat.

DV SERIES


- + Pressurized Water System
- + Standard Offset Drum Design
- + Automatic Vibration Control
- + Serviceability Second-to-None

PT SERIES

- + Iso-Static Front Axle
- + Standard Air-on-the-Run

COMBINATION ROLLERS

- + Vibratory Front Drum
- + Pneumatic Rear Tires

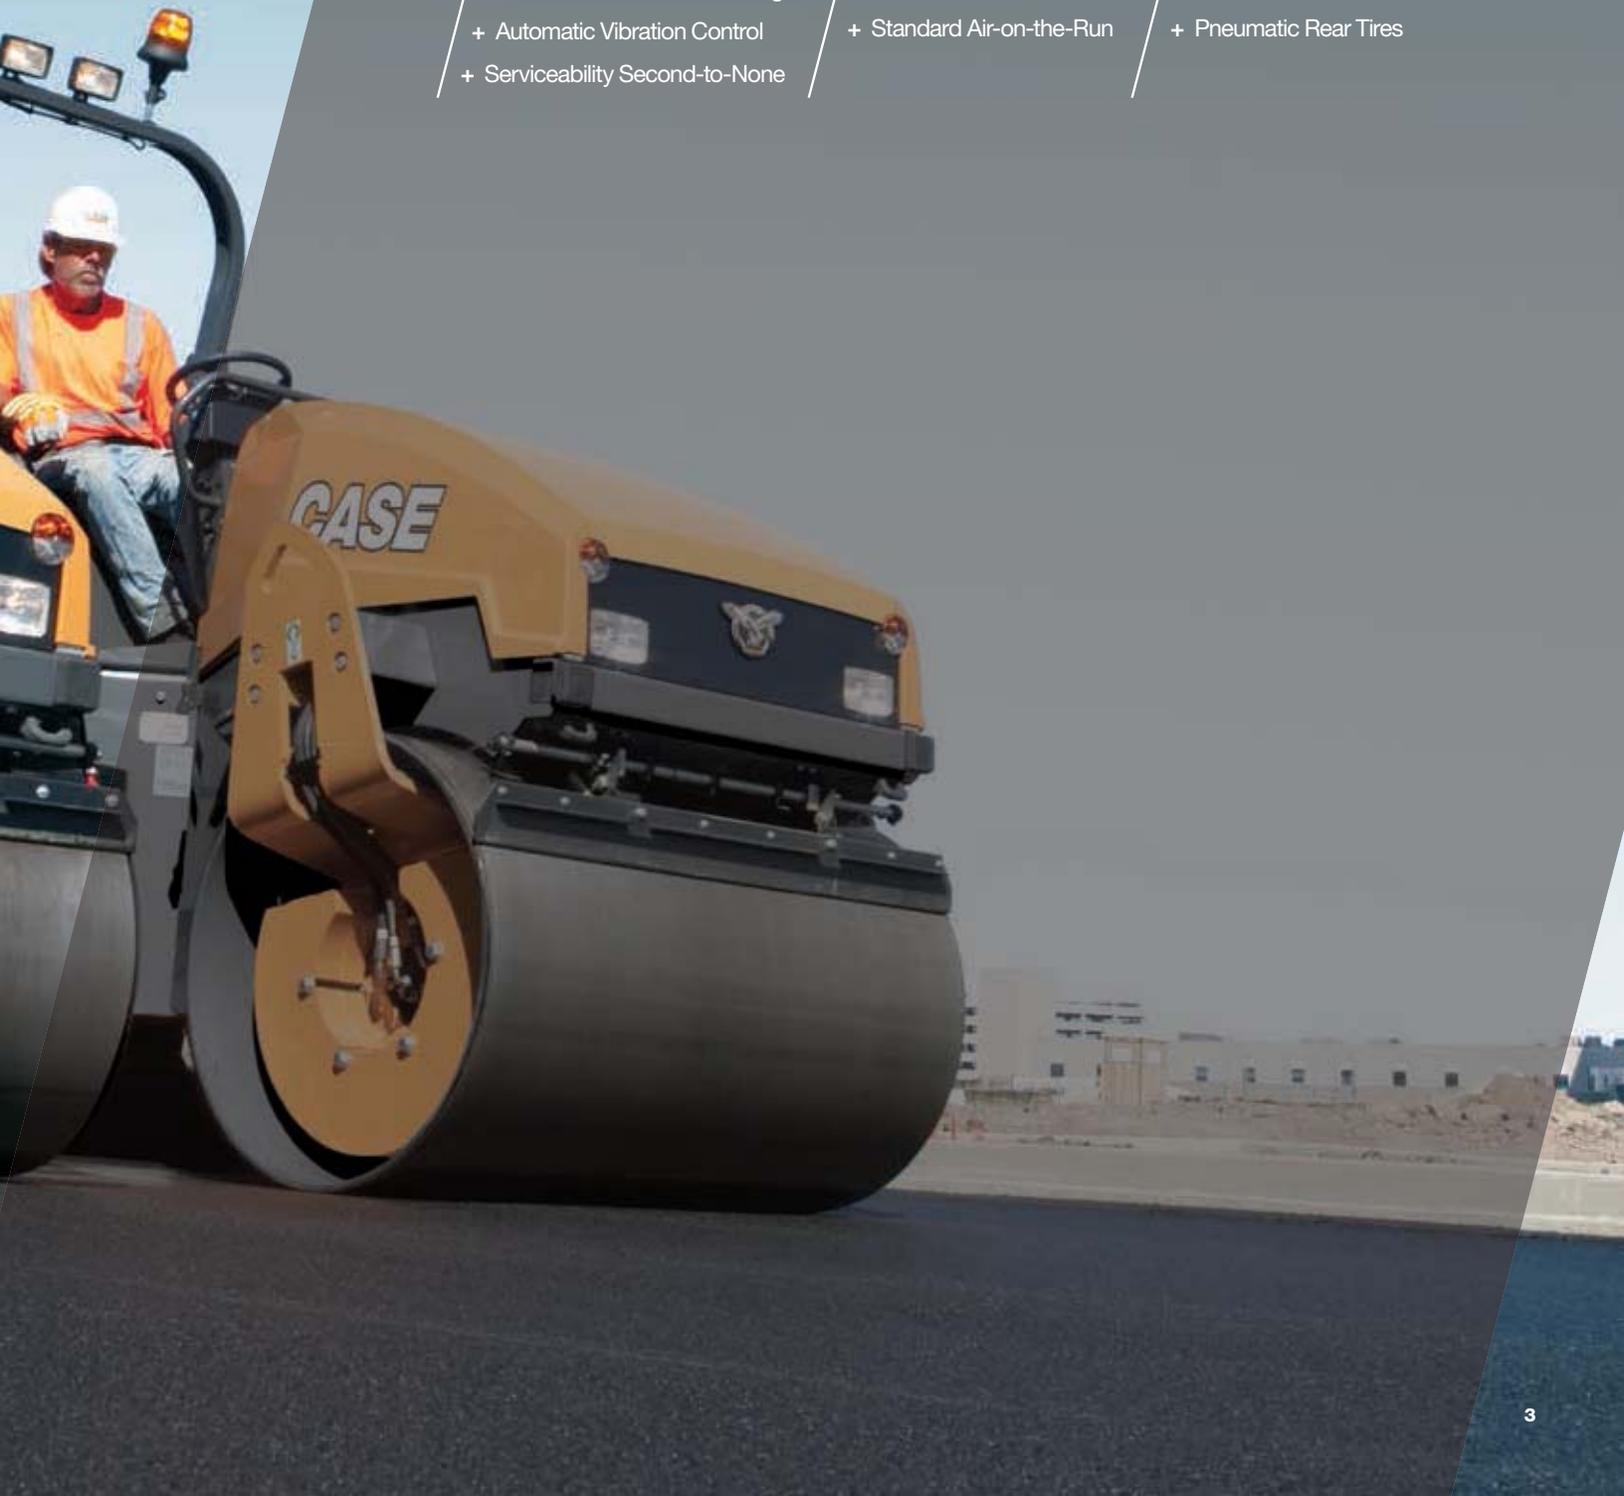

INSIDE THE LARGE DV

DV207/DV209D/DV210D/DV213



SWIVEL, SLIDE AND SPIN TO SEE

In addition to a seat that spins left or right and slides forward, the entire operator station – seat, steering console and drive lever – swivels almost 180° to reach both edges of the platform and provide operators a full view of the compacted surface, both drums and all spray bars.



COMMON-SENSE CONTROLS

Dual multi-function directional levers on either side of the seat allow for right- or left-handed operation. Automatic vibration control makes it easy to avoid surface damage from starting or stopping the machine. And if manual activation is preferred, it's just a push of a button. Also, an adjustable speed control lets operators set a max speed so there's no need to worry about going too fast for the frequency of the drum. The DV209D and DV210D feature a new intuitive and innovative in-steering wheel front display. This display provides all machine diagnostics for the operator to review. The operator structure is also completely redesigned to continue to offer excellent visibility to both drums while offering a comfortable and ergonomic operating environment.



Open ROPS work platform provides excellent visibility around the machine. Enclosed cab available.



INSIDE THE SMALL DV

DV23/DV26/DV36/DV45



SUPERIOR SIGHT LINES

All small DV models come standard with features to maximize visibility around the machine. For starters, a lateral-sliding seat with integrated operating lever gives operators a comfortable view of all drum edges while keeping controls within reach. A narrow front console and tapered hood improve forward visibility, while a flat-back design allows for a full view of the rear.



FATIGUE-FIGHTING COMFORT

The operator's platform is isolated from the chassis to reduce vibration from the engine and is on a heavy-duty rubber mount to help absorb shock.



CONTROLS MADE SIMPLE

Operation is easy with a steering wheel and a single lever controlling forward/reverse travel, sprinkler activation and the vibration system, which allows for automatic or manual start/stop of drum vibration.



INSIDE THE PT240



DUAL WORK STATIONS

The dual operating seats of the PT240 allow operators to place themselves at either edge of the machine for maximum visibility of the working side. Each station mirrors the other and offers adjustable seats and automotive-style drive controls for a familiar feel. There is also ample storage space under each seat.



EVERYTHING AT YOUR FINGERTIPS

Centralized controls are easily within reach from either seat, including AOR switch, sprinkler flow selector, working lights, turn signals, emergency stop and more. The control panel also includes warning lights, speedometer and an easy to access fuse panel.



DOMINATE WITH LARGE DV ROLLERS
DV207/DV209D/DV210D/DV213



HIGH-FREQUENCY OPTION

The CASE DV207, DV209D and DV210D are available in high-frequency models maxing out at 67 Hz. This increases the application opportunities for the CASE roller line, allowing operators to compact a more versatile array of asphalt mixes.



SUPERIOR WATER SYSTEM

Water plays a crucial role in preventing surface damage and keeping rollers clean. That's why every component of DV rollers' spray system is built to be the best.

- + Triple Filtration – Filters at the tank, pump and nozzles help prevent spray-stopping clogs and prolong component life
- + Pressurization – Maintains even water flow to all nozzles regardless of grade
- + Standard Back-Up Pump – Ensures uninterrupted production with primary and back-up pumps
- + Multiple Water Settings – Matches water pressure to the job at hand
- + Dual Fill Ports – Offers convenient access from either side

HIGH-FREQUENCY OPTIONS

The CASE high-frequency option features a low amplitude setting that is ideal for thin-layer asphalt compaction at faster speeds. Thinner layers of asphalt tend to cool quicker and use smaller aggregates that can be crushed if too much force is applied. This option increases the versatility of the DV207, DV209D and DV210D by increasing the range of applications and asphalt mixes on which they can be used.



IMPRESSIVE MANEUVERABILITY

CASE large DV rollers come standard with a hydraulically adjustable "crab steering" system that can offset the rear drum up to seven inches*. In addition to that, a heavy-duty, roller-style articulation joint allows the machine to oscillate +/-10° to maintain drum-to-ground contact. Together, these features enable superior operation around corners, over bumps or dips, and in confined areas.

*Seven-inch offset on DV207



SAVE TIME WITH SMALL DV ROLLERS
DV23/DV26/DV36/DV45





SUPERIOR WATER SYSTEM

Just like their big brothers, our small DV rollers are designed with the highest-quality water system.

- + Dual Filtration – Water is filtered at both the fill point and midway through the water cycle, reducing the amount of debris that can make it to the spray nozzle
- + Pressurization – Maintains even water flow to all nozzles regardless of grade
- + High-Capacity, Corrosion-Proof Tank – Runs all day on a single tank
- + Multiple Water Settings – Matches water pressure to the job at hand



STANDARD OFFSET DRUM WITH EXCELLENT CURB CLEARANCE

The front drums of our small DV rollers are positioned about two inches off center from the back drum, allowing for a tighter turning radius, while both drums have a balanced design and a tapered edge to reduce tearing around curves and during transitions.



INDUSTRY-LEADING PERFORMANCE

Dual frequency is standard on all small DV models, with dual amplitude standard on DV36 and DV45 – helping generate outstanding compaction on any surface. An electronic control module smoothly moves the rollers forward or reverse, unlike direct-link cables, which can lurch and create waves in the compaction surface.

PRECISION OF THE PNEUMATIC
PT240





BALLAST UP TO 24 TONS

Ideal for stabilizing soil and sand, the versatile PT240's operating weight can easily be increased to more than 52,000 pounds (24 MT). Ballasts can be attached underneath, an available watertight frame allows for fluid ballast and the machine frame can hold additional scrap.



FOUR-PLUS-FOUR TIRE SETUP

The PT240 design uses dual front axles and four rigid rear tires with a two-inch offset for a total compaction width of 78 inches (1 984 mm). The maneuverable front configuration creates a "kneading" effect for uneven surfaces, while the fixed rear axle presses materials firmly into place.



ISO-STATIC FRONT AXLE

Each pair of front tires oscillates five degrees in either direction and moves four inches up and down. This helps maintain contact with the ground at all times to minimize bridging and maximize compaction – and also creates a more comfortable ride for the operator.



STANDARD AIR-ON-THE-RUN (AOR)

Unlike most competitive models, CASE pneumatic tire compactors come standard with AOR. This automatic central tire inflation system ensures consistent pressure to all eight tires at all times, and allows for easy adjustment of tire pressure to meet ground conditions and compaction needs.



ASPHALT ADD-ONS

The PT240 also offers a triple-filtration water system with a pressurized, polyethylene tank and sprinkler bars for the front and rear tires. Optional thermal aprons keep heat close to the tires to prevent asphalt from sticking. Cocoa mats are also available.

MAINTENANCE MADE EASY

SERVICEABILITY IS IN OUR DNA

When you invest in CASE equipment, you need it to last. We make it simple. CASE DV and PT Series rollers are no exception. From their open-access hoods to grouped, ground-level checkpoints, you can do daily maintenance in a matter of minutes. It's the easiest way to help you get the most performance and longest life out of your machine.



Easy access to DVS

- | | | |
|---|-------------------------------|--|
| ① Spin-on fuel, oil and hydraulic filters | ⑤ Engine | ⑨ Greaseless Teflon articulation joint (Small DVs) |
| ② Vertical-lift rear hood (Large DVs) | ⑥ Oil fill | ⑩ Flip-forward hood (Small DVs) |
| ③ Drive motor or eccentric motor | ⑦ Dual fill ports (Large DVs) | ⑪ No tool access, swing out doors |
| ④ Heavy-duty articulation joint | ⑧ Spray nozzles | |



Easy access to PT

12 Drains for engine oil, gearbox oil and water

13 Water fill

14 Service doors

15 Flip-up hood

16 Hydraulic check

SUPPORT COMES STANDARD

BASE & EXTENDED WARRANTY COVERAGE:

1-YEAR/UNLIMITED-HOUR FULL-COVERAGE BASE LIMITED WARRANTY

2-YEAR/2,000-HOUR EXTENDED ENGINE WARRANTY

Discuss the extended engine warranty coverage details with your dealer.

UPTIME SOLUTIONS

Your CASE dealer can provide solutions to meet all your needs and keep you productive.



STRONGER PRODUCT SUPPORT SOLUTIONS

Your CASE dealer knows best how you can maximize your equipment investment and uptime—with genuine CASE parts, expert service and a complete range of product support solutions including CASE remanufactured and all-makes parts. CASE supports better parts availability and faster deliveries through nine parts distribution centers in North America and a forecasting system to ensure that the right parts will be there when you need them. And only CASE dealers have exclusive access to the Electronic Service Tool (EST) that quickly pinpoints machine issues. Just ask your dealer for details.



FLEXIBLE FINANCIAL OPTIONS

Specialized finance programs and flexible leasing packages put you in the driver's seat of industry-leading CASE equipment while no-nonsense warranties and comprehensive protection plans ensure that your equipment is protected. As the only finance company dedicated to CASE, we offer strong products and services designed around your unique needs and are the only ones supported by the helpful service professionals at your CASE dealer.

*Please see your CASE dealer for limitations, exclusions and confirmation of policies in effect.





REMOTE CONTROL



Available on large DV Series rollers and the PT240, CASE SiteWatch™ telematics breaks the boundaries of fleet management by allowing you to monitor and manage multiple machines from your office, wherever that may be. No more manually tracking down engine hours and fuel levels. Get real-time performance metrics, idle-time analytics, scheduled maintenance intervals and programmable security alerts sent to any computer, anytime, anywhere.




SPECIFICATIONS AND DIMENSIONS

SPECIFICATIONS	DV23	DV23CC	DV26	DV26CC	DV36	DV45	DV45CC	DV207	DV209D	DV209CD	DV210D	DV210CD	DV213	PT240
Engine	Yanmar 3TNV88	Yanmar 3TNV88	Yanmar 3TNV88	Yanmar 3TNV88	Yanmar 4TNV88	Yanmar 4TNV88	Yanmar 4TNV88	Cummins BTAA 3.3-C80	Deutz TCD 3.6L4	Deutz TCD 3.6L4	Deutz TCD 3.6L4	Deutz TCD 3.6L4	Cummins QSB 4.5-C130	Engine Cummins QSB 3.3 C99
Emissions Certification Solutions	Tier 4 Interim	Tier 3	Tier 4 Final	Tier 4 Final	Tier 4 Final	Tier 4 Final	Tier 3	Emissions Certification Solutions Tier 3						
Gross Horsepower – hp (kW)	32.5 (24.2) @ 2600 RPM	41.6 (31.0) @ 2500 RPM	41.6 (31.0) @ 2500 RPM	40.8 (30.0) @ 2500 RPM	80.0 (59.7) @ 2100 RPM	100.0 (74.4) @ 2200 RPM	100.0 (74.4) @ 2200 RPM	100.0 (74.4) @ 2200 RPM	100.0 (74.4) @ 2200 RPM	130.0 (96.9) @ 2200 RPM	Gross Horsepower – hp (kW) 99 (73.8) @ 2200 RPM			
Maximum Travel Speed – mph (kph)	6.2 (10.0)	6.2 (10.0)	6.2 (10.0)	6.2 (10.0)	6.2 (10.0)	6.2 (10.0)	6.2 (10.0)	7.1 (11.4)	6.5 (10.5)	6.5 (10.5)	6.5 (10.5)	6.5 (10.5)	7.1 (11.4)	Maximum Travel Speed – mph (kph) 12 (19.3)
Gradeability (vibration off)	30° (40°)	30° (40°)	30° (40°)	30° (40°)	30° (40°)	30° (40°)	30° (40°)	20° (30°)	30%	30%	30%	30%	40%	Gradeability 25%
Operating Weight – lb (kg)	4,960 (2 250)	4,740 (2 150)	5,423 (2 460)	4,913 (2 230)	8,245 (3 740)	10,296 (4 670)	9,535 (4 325)	16,226 (7 360)	21,080 (9 560)	20,750 (9 410)	22,930 (10 400)	22,440 (10 180)	28,718 (13 026)	Operating Weight – lb (kg) 20,525 (9 310)
Front Drum Weight – lb (kg)	2,700 (1 225)	2,700 (1 225)	2,921 (1 325)	2,921 (1 325)	4,740 (2 150)	5,621 (2 550)	5,621 (2 550)	8,267 (3 750)	10,520 (4 770)	10,520 (4 770)	11,490 (5 210)	11,490 (5 210)	14,561 (6 605)	Maximum Operating Weight – lb (kg) 52,910 (24 000)
Rear Drum Weight – lb (kg)	2,700 (1 225)	–	2,921 (1 325)	–	4,740 (2 150)	5,621 (2 550)	–	7,959 (3 610)	10,560 (4 790)	–	11,440 (5 190)	–	14,164 (6 425)	Outside Turning Radius l/r – in (mm) 392/344 (9 960/ 8 735)
Inside Turning Radius – in (m)	93 (2 350)	89 (2 250)	89 (2 250)	89 (2 250)	102 (2 581)	102 (2 581)	103 (2 621)	181.2 (4 602)	215 (5 470)	215 (5 470)	215 (5 470)	215 (5 470)	147 (3 730)	Inside Turning Radius l/r – in (mm) 243/239 (6 180/ 6 065)
Fuel Tank Capacity – gal (L)	10.6 (40)	10.6 (40)	10.6 (40)	10.6 (40)	15.6 (59)	15.6 (59)	15.6 (59)	29.1 (110)	58.1 (220)	58.1 (220)	58.1 (220)	58.1 (220)	55.5 (210)	Fuel Tank Capacity – gal (L) 66.0 (250)
Frequency Low - High* – VPM (Hz)	3,480 - 3,960 (58 - 66)	3,480 - 3,960 (58 - 66)	3,480 - 3,960 (58 - 66)	3,480 - 3,960 (58 - 66)	2,700 - 3,420 (45 - 57)	2,700 - 3,420 (45 - 57)	2,700 - 3,420 (45 - 57)	2,580 - 3,120 (43 - 52)	2,520 - 4,020 (42 - 67)	2,520 - 4,020 (42 - 67)	2,520 - 4,020 (42 - 67)	2,520 - 4,020 (42 - 67)	2,520 - 3,000 (42 - 50)	

DIMENSIONS	DV23	DV23CC	DV26	DV26CC	DV36	DV45	DV45CC	DV207	DV209D	DV209CD	DV210D	DV210CD	DV213	PT240
Wheelbase	64.2 in (1 630 mm)	76.8 in (1 950 mm)	76.8 in (1 950 mm)	79.1 in (2 008 mm)	128.4 in (3 260 mm)	137.8 in (3 500 mm)	139.0 in (3 540 mm)	Wheelbase 149.6 in (3 800 mm)						
Drum Diameter	27.6 in (700 mm)	33.5 in (850 mm)	33.5 in (850 mm)	33.5 in (850 mm)	45.3 in (1 150 mm)	48.0 in (1 220 mm)	51.0 in (1 300 mm)	Tire Size 11.0 x 20 18PR						
Ground Clearance	10.8 in (275 mm)	12.8 in (325 mm)	12.8 in (325 mm)	12.8 in (325 mm)	9.5 in (240 mm)	11.8 in (300 mm)	11.8 in (300 mm)	11.8 in (300 mm)	11.8 in (300 mm)	13.4 in (340 mm)	Ground Clearance 13.4 in (340 mm)			
Overall Height	100.4 in (2 550 mm)	111.0 in (2 826 mm)	111.0 in (2 826 mm)	111.0 in (2 826 mm)	116.1 in (2 950 mm)	118.0 in (3 000 mm)	120.0 in (3 050 mm)	Overall Height 122.4 in (3 110 mm)						
Overall Length	98.7 in (2 506 mm)	117.0 in (2 971 mm)	117.0 in (2 971 mm)	117.0 in (2 971 mm)	174.0 in (4 410 mm)	185.0 in (4 720 mm)	193.0 in (4 890 mm)	Overall Length 197.6 in (5 020 mm)						
Drum Width	39.4 in (1 001 mm)	39.4 in (1 001 mm)	47.2 in (1 199 mm)	47.2 in (1 200 mm)	51.2 in (1 300 mm)	54.3 in (1 379 mm)	54.3 in (1 379 mm)	57.0 in (1 448 mm)	66.0 in (1 680 mm)	83.0 in (2 108 mm)	Compaction Width 78.1 in (1 984 mm)			
Overall Width	44.4 in (1 129 mm)	52.5 in (1 334 mm)	52.5 in (1 334 mm)	50.9 in (1 294 mm)	56.0 in (1 423 mm)	59.1 in (1 503 mm)	57.6 in (1 463 mm)	60.6 in (1 540 mm)	71.0 in (1 800 mm)	87.0 in (2 220 mm)	Overall Width of Fixed Parts 82.7 in (2 100 mm)			
Drum Thickness	0.51 in (13 mm)	0.51 in (13 mm)	0.50 in (13 mm)	0.50 in (13 mm)	0.70 in (17 mm)	0.70 in (17 mm)	0.70 in (17 mm)	0.60 in (15 mm)	0.90 in (22 mm)	0.79 in (20 mm)	Tire Overlap 2.0 in (51 mm)			

*Frequency range includes standard and high frequency models when applicable

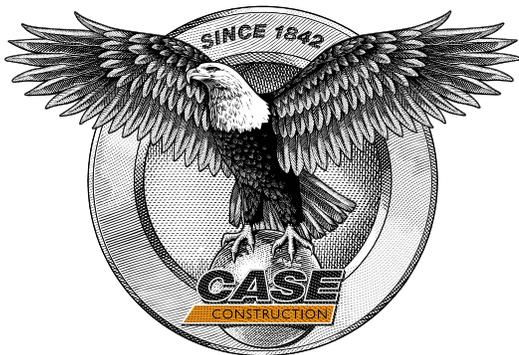

BUILDING A STRONG CASE

Since 1842, we at CASE Construction Equipment have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity. We continually strive to make it easier for our customers to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development. This focus has led to numerous innovations like Ride Control™, EZ-EH controls, blade shake, PowerLift™, over-center boom design and the peace of mind that only CASE ProCare provides.

Every CASE machine is backed by more than 350 North American dealer locations, thousands of OEM, remanufactured and Gold Value™ parts, and flexible financing and insurance options that provide the kind of reliable, steadfast support you expect from a professional partner.

We are passionate about improving the lives of others, whether investing in our veterans or raising awareness about local infrastructure initiatives through Dire States. Our goal is to build both stronger machines — and stronger communities.

At the end of the day, we do what's right by our customers and our communities so that they can count on CASE.

CaseCE.com/AsphComp

©2017 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

Form No. CCE201705ASPHCOMP
Replaces Form No. CCE201404ASPHCOMP

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

CASE
CONSTRUCTION

Soil Compactors

SV AND PT SERIES



SV208 | SV208D | SV212 | SV216 | PT240

SINCE 1842

More Compaction Per Pass

With four machines that deliver unmatched gradeability and industry-leading performance, the SV Series are real difference-makers in compaction applications. They can work in places competitors just can't, such as water retention areas or steep traffic grades. And from ground prep to final pass, the PT pneumatic tire compactor has the versatility contractors need. Plus, both the SV and PT soil compactors offer superior serviceability and are as durable as they come.



SV208*



SV208D



SV212*



SV216*



PT240*

*Model available in Canada only

SV SERIES

- + Industry-Best Gradeability
- + Best-in-Class Centrifugal Force
- + Hydrostatic Drive System
- + Superior Drum Design

PT SERIES

- + Iso-Static Front Axle
- + Standard Air-on-the-Run





INSIDE THE SV



OPEN OPERATING ENVIRONMENT

All SV Series models come standard with an open ROPS-certified canopy* and a narrow front console to maximize visibility of the drum and work area. The operating platform can also be accessed from either side for added convenience.

*Enclosed cab with heat and air available



EXCEPTIONAL REAR VISIBILITY

Visibility behind the machine is invaluable for compaction, where nearly half of operating time is spent in reverse. That's why the SV Series is designed with a fully adjustable swivel seat that rotates 50°. Coupled with one of the lowest-profile hoods in the industry, operators can see more with less strain.



INTUITIVE CONTROLS

The heavy-duty front console is made of metal for longer component life and offers simple controls that are easy to learn. There's also an integrated travel lever, with push-button vibration activation, that swivels with the seat to keep operators comfortably in control.



INSIDE THE PT



DUAL WORK STATIONS

The dual operating seats of the PT240 allow operators to place themselves at either edge of the machine for maximum visibility of the working side. Each station mirrors the other and offers adjustable seats and automotive-style drive controls for a familiar feel. There is also ample storage space under each seat.



EVERYTHING AT YOUR FINGERTIPS

Centralized controls are easily within reach from either seat, including AOR switch, sprinkler flow selector, working lights, turn signals, emergency stop and more. The control panel also includes warning lights, speedometer and an easy to access fuse panel.



STRENGTH IN THE SV

SEVERAL SV SETUPS


SV Series compactors offer multiple configurations to meet demanding applications:

- + Automatic Traction Control (ATC) – Maintains consistent flow to all drive motors to improve traction control
- + HX Drive provides improved speed and gradeability and, when coupled with excellent torque, you have the equipment features needed to get the job done.





UNRIVALED LEVEL OF GRADEABILITY
 Compacts where others can't: SV Series rollers are able to compact while holding an industry-leading grade of up to 65%. It's made possible by the low center of gravity resulting from our axle-free design, which allows the engine to sit lower, helping hold the drum to the ground.

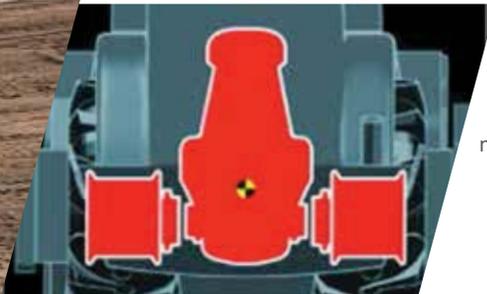

HYDROSTATIC DRIVE SYSTEM
 All SV Series rollers use three separate hydrostatic motors to drive the drum and each rear wheel. By eliminating the rear axle, the engine sits lower between the tires, making it more accessible and minimizing hood height for greater visibility.



BEST-IN-CLASS CENTRIFUGAL FORCE
 Higher lifts, deeper depths and fewer passes – get the job done quicker, thanks to some of the highest centrifugal forces of their class. You can even use a smaller, more fuel-efficient CASE machine to achieve compaction equal to that of a larger class, reducing your cost of ownership.



THE DRUM MAKES THE DIFFERENCE
 CASE roller drums are designed inside and out for superior performance, straighter travel and a smoother ride. Weight is evenly distributed throughout the drum to help reduce drift and maintain constant compaction during each rotation, while a heavy-duty rubber iso-mount enhances comfort by keeping vibrations from spreading to the machine.



60% Front 40% Rear

IDEAL WEIGHT DISTRIBUTION
 The SV Series offers a weight distribution of 40% in the rear and 60% in the front. The heavier front end enhances compaction forces and reduces the risk of the drum "jumping" off the ground.

PRECISION OF THE PT



POWER TO PERFORM

A 99-horsepower, turbocharged engine with standard power-shift transmission and high-capacity, 66-gal. fuel tank keep the PT240 on the job for long days full of long passes.



ISO-STATIC FRONT AXLE

Each pair of front tires oscillates five degrees in either direction and moves four inches up and down. This helps maintain contact with the ground at all times to minimize bridging and maximize compaction, and it also creates a more comfortable ride for the operator.



FOUR-PLUS-FOUR TIRE SETUP

The PT240 design uses dual front axles and four rigid rear tires with a two-inch offset for a total compaction width of 78 inches (1 986 mm). The maneuverable front configuration creates a “kneading” effect for uneven surfaces, while the fixed rear axle presses materials firmly into place.



STANDARD AIR-ON-THE-RUN (AOR)

Unlike most competitive models, CASE pneumatic tire compactors come standard with AOR. This automatic central tire inflation system ensures consistent pressure to all eight tires at all times, and allows for easy adjustment of tire pressure to meet ground conditions and compaction needs.



BALLAST UP TO 24 TONS

Ideal for stabilizing soil and sand, the versatile PT240’s operating weight can easily be increased to more than 52,000 pounds (24 MT). Ballasts can be attached underneath, an available watertight frame allows for fluid ballast and the machine frame can hold additional scrap.

MAINTENANCE MADE EASY

SERVICEABILITY IS IN OUR DNA

When you invest in CASE equipment, you need it to last. We make it simple. CASE SV and PT compactors are no exception. From flip-up hoods to ground-level service points to easy-access drains, you can do daily maintenance in a matter of minutes. It's the easiest way to help you get the most performance and longest life out of your machine.



Easy access to SV

- ① Oil fill
- ② Air filters
- ③ Lockable fuel cap
- ④ Dual batteries
- ⑤ Cooling system
- ⑥ Flip-up hood
- ⑦ Tilttable operating platform
- ⑧ Hydraulic hose routing

Service-free features

- + Heavy-duty rubber drum mount
- + Self-lubricating exciter system
- + High-capacity roller bearing



Easy access to PT

- 9 Drains for engine oil, gearbox oil and water
- 10 Water fill for watertight frame
- 11 Service doors
- 12 Flip-up hood
- 13 Hydraulic check

SUPPORT COMES STANDARD

BASE & EXTENDED WARRANTY COVERAGE:

1-YEAR/UNLIMITED-HOUR FULL-COVERAGE BASE LIMITED WARRANTY

2-YEAR/2,000-HOUR EXTENDED ENGINE WARRANTY

Discuss the extended engine warranty coverage details with your dealer.

UPTIME SOLUTIONS

Your CASE dealer can provide solutions to meet all your needs and keep you productive.



STRONGER PRODUCT SUPPORT SOLUTIONS

Your CASE dealer knows best how you can maximize your equipment investment and uptime—with genuine CASE parts, expert service and a complete range of product support solutions including CASE remanufactured and all-makes parts. CASE supports better parts availability and faster deliveries through nine parts distribution centers in North America and a forecasting system to ensure that the right parts will be there when you need them. And only CASE dealers have exclusive access to the Electronic Service Tool (EST) that quickly pinpoints machine issues. Just ask your dealer for details.



FLEXIBLE FINANCIAL OPTIONS

Specialized finance programs and flexible leasing packages put you in the driver's seat of industry-leading CASE equipment while no-nonsense warranties and comprehensive protection plans ensure that your equipment is protected. As the only finance company dedicated to CASE, we offer strong products and services designed around your unique needs and are the only ones supported by the helpful service professionals at your CASE dealer.

*Please see your CASE dealer for limitations, exclusions and confirmation of policies in effect.





REMOTE CONTROL

SiteWatch™


Available on SV Series compactors and the PT240, CASE SiteWatch™ telematics breaks the boundaries of fleet management by allowing you to monitor and manage multiple machines from your office, wherever that may be. No more manually tracking down engine hours and fuel levels. Get real-time performance metrics, idle-time analytics, scheduled maintenance intervals and programmable security alerts sent to any computer, anytime, anywhere.



SPECIFICATIONS AND DIMENSIONS

SPECIFICATIONS	SV208	SV208D	SV212	SV216		PT240
Engine	Cummins QSB 3.3 C99	Deutz TCD 4.1	Cummins QSB 4.5	Cummins QSB 4.5	Engine	Cummins QSB 3.3 C99
Emissions Certification Solutions	Tier 3	Tier 4 Final	Tier 3	Tier 3	Emissions Certification Solutions	Tier 3
Gross Horsepower – hp (kW)	99 (73.8)	74.3 (55.4)	148 (110)	148 (110)	Gross Horsepower – hp (kW)	99 (74)
Maximum Travel Speed – mph (kph)	8.7 (14.0)	8.7 (14.0)	8.5 (13.7)	7.5 (12.2)	Maximum Travel Speed – mph (kph)	11.8 (19.0)
Gradeability (with traction assist)	65%	65%	66%	65%	Gradeability	25%
Operating Weight Smooth Drum without Cab – lb (kg)	15,170 (6 880)	15,170 (6 880)	25,530 (11 580)	33,730 (15 300)	Operating Weight – lb (kg)	21,140 (9 590)
Operating Weight Padfoot Drum without Cab – lb (kg)	26,500 (12 020)	17,570 (7 970)	26,870 (12 188)	33,530 (15 209)	Maximum Operating Weight – lb (kg)	52,910 (24 000)
Smooth Drum Weight – lb (kg)	8,844 (4 012)	8,800 (3 990)	16,212 (7 354)	24,066 (10 916)	Outside Turning Radius I/r – in (mm)	392/344 (9 960/8 735)
Inside Turning Radius – in (m)	122 (3.09)	126 (3.2)	120 (3.05)	120 (3.05)	Inside Turning Radius I/r – in (mm)	243/239 (6 180/6 065)
Fuel Tank Capacity – gal (L)	72.7 (275)	67.36 (255)	108 (410)	108 (410)	Fuel Tank Capacity – gal (L)	66.0 (250)
Centrifugal Force – lbf (kN)	32,586 (145)	32,586 (145)	62,250 (277)	73,037 (325)		

DIMENSIONS	SV208	SV208D	SV212	SV216		PT240
Wheelbase	100.8 in (2.6 m)	106.0 in (2.7 m)	113.0 in (2.9 m)	115.4 in (2.9 m)	Wheelbase	149.6 in (3 800 mm)
Smooth Drum Diameter	51.0 in (1.3 m)	51.0 in (1.3 m)	59.0 in (1.5 m)	59.0 in (1.5 m)	Tire Size	11.0 x 20 18PR
Padfoot Drum Diameter	55.0 in (1.4 m)	55.0 in (1.4 m)	64.6 in (1.64 m)	64.6 in (1.64 m)	Ground Clearance	13.4 in (340 mm)
Ground Clearance	15.2 in (0.39 m)	15.2 in (0.39 m)	17.3 in (0.44 m)	17.3 in (0.44 m)	Overall Height	122.4 in (3 110 mm)
Overall Height	113.0 in (2.87 m)	113.0 in (2.87 m)	121.0 in (3.1 m)	121.0 in (3.1 m)	Overall Length	197.6 in (5 020 mm)
Overall Length	205.0 in (5.2 m)	207.5 in (5.3 m)	227.0 in (5.8 m)	232.3 in (5.9 m)	Compaction Width	78.2 in (1 986 mm)
Drum Width	66.0 in (1.68 m)	66.0 in (1.68 m)	84.0 in (2.13 m)	84.0 in (2.13 m)	Overall Width of Fixed Parts	82.7 in (2 100 mm)
Overall Width	67.7 in (1.7 m)	73.9 in (1.9 m)	88.9 in (2.25 m)	88.9 in (2.25 m)	Tire Overlap	2.01 in (51 mm)
Frame Extensions	1.4 in (0.035 m)	3.85 in (0.098 m)	4.0 in (0.11 m)	4.0 in (0.11 m)		
Drum Thickness	1.0 in (0.025 m)	1.0 in (0.025 m)	1.0 in (0.025 m)	1.6 in (0.04 m)		

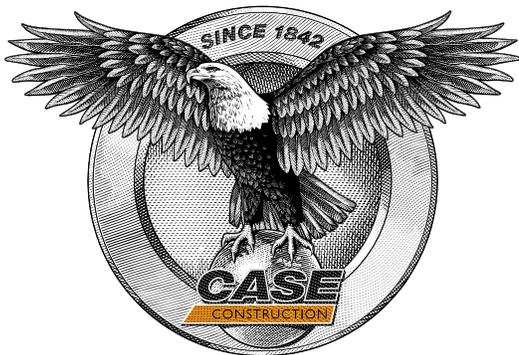

BUILDING A STRONG CASE

Since 1842, we at CASE Construction Equipment have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity. We continually strive to make it easier for our customers to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development. This focus has led to numerous innovations like Ride Control™, EZ-EH controls, blade shake, PowerLift™, over-center boom design and the peace of mind that only CASE ProCare provides.

Every CASE machine is backed by more than 350 North American dealer locations, thousands of OEM, remanufactured and Gold Value™ parts, and flexible financing and insurance options that provide the kind of reliable, steadfast support you expect from a professional partner.

We are passionate about improving the lives of others, whether investing in our veterans or raising awareness about local infrastructure initiatives through Dire States. Our goal is to build both stronger machines — and stronger communities.

At the end of the day, we do what's right by our customers and our communities so that they can count on CASE.

CaseCE.com/SoilComp

©2017 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

Form No. **CCE201705SOILCOMP**
Replaces Form No. CCE201404SOILCOMP

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.



CASE
CONSTRUCTION

CASE PROTECTION PLAN

**FOR NEW & USED
CONSTRUCTION EQUIPMENT**

ADVANTAGES OF THE CASE PROTECTION PLAN

PEACE OF MIND

Provides protection beyond the Manufacturer's Base Warranty Period.

FLEXIBLE OPTIONS

Plans can be customized to meet individual needs.

FINANCING AVAILABLE

Plans may be financed on CNH Industrial Capital America LLC. (CNH Industrial Capital) retail installment contracts and leases (retail contract) or commercial revolving accounts.

DEPENDABLE SERVICE

Eligible repairs completed by authorized service technicians using genuine OEM parts.

TRANSFERABLE PROTECTION

New Equipment Plans may be transferred to a new owner at no charge.

PRODUCTS DESIGNED TO MEET YOUR NEEDS

We understand the equipment business. That's why we offer these additional products to help keep your operation running smoothly.

CREDIT LIFE INSURANCE

Provides life insurance coverage to help pay off the balance due on equipment financed with CNH Industrial Capital, in the event of insured's death.

RENTAL DAMAGE WAIVER

Helps protect rented equipment against most causes of direct physical loss or damage.

PHYSICAL DAMAGE INSURANCE

Provides coverage to repair or replace insured equipment in the event of direct physical loss or damage.

GETTING STARTED

For more information, contact your local CASE dealer or call CNH Industrial Insurance Agency Inc. at **1-866-559-6814**.

CNH
INDUSTRIAL | INSURANCE

This literature is descriptive only. The precise protection afforded is subject to the terms, conditions and exclusions of the contract as issued. Program participation for all products is subject to customer credit qualification and/or other underwriting requirements. Programs may be changed or cancelled without notice. All insurance products offered through CNH Industrial Insurance Agency Inc. are underwritten by licensed insurance companies. Capitalized terms used in this literature, unless defined herein, have the meanings assigned to them in the contract as issued.

©2014 CNH Industrial Insurance Agency Inc. All rights reserved. CNH Industrial Insurance Agency Inc. is an Am Trust Financial company. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Insurance logo is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates.

Form #50033 Rev. 04/2014



CNH
INDUSTRIAL | INSURANCE

PROTECT YOUR EQUIPMENT BEYOND THE BASE WARRANTY PERIOD



CASE PROTECTION PLAN

When the unexpected occurs, you need to know that your equipment is protected. The CASE Protection Plan is a purchased service contract designed to help keep your equipment working properly beyond the Manufacturer's Base Warranty Period.

Select the Plan Option that best meets your needs:

NEW EQUIPMENT PLAN OPTIONS

- Structural
- Powertrain
- Powertrain Plus Hydraulics
- Premier

New Equipment Plans are available for Protection Periods of up to 60 total months or 7,500 total machine hours, whichever occurs first. The Protection Period you select includes the Manufacturer's Base Warranty Period.

USED EQUIPMENT PLAN OPTIONS

- Powertrain
- Powertrain Plus Hydraulics

Used Equipment Plans are available for Protection Periods of up to 36 months or 6,000 machine hours, whichever occurs first, for eligible equipment that is beyond the Manufacturer's Base Warranty Period.

STAY PRODUCTIVE WITH A CASE PROTECTION PLAN.

NEW EQUIPMENT PLAN OPTIONS*

USED EQUIPMENT PLAN OPTIONS*

Eligible Components	Structural**	Powertrain	Powertrain Plus Hydraulics	Premier	Powertrain	Powertrain Plus Hydraulics
Engine		•	•	•	•	•
Transmission		•	•	•	•	•
Drive Line		•	•	•	•	•
Differential / Final Drive		•	•	•	•	•
Hydrostatic Pump and Motor		•	•	•	•	•
Electronic Controls		•	•	•	•	•
Fuel System		•	•	•	•	•
Steering Pump			•	•		
Hydraulic Pumps			•	•		•
Hydraulic Valves			•	•		•
Hydraulic Cylinders			•	•		•
Hydraulic Hoses			•	•		•
Electrical				•		
Chassis		•				
Main Frame		•				
ROPS		•				
Boom		•				

* See your dealer for the CASE Protection Plan Master Parts Schedule and Terms and Conditions document for exact Plan details and exclusions.
 ** May be purchased separately or with Powertrain, Powertrain Plus Hydraulics or Premier New Equipment Plan Options.

NEW EQUIPMENT PLANS

- Equipment that is within the Manufacturer's Base Warranty Period, or up to 120 days beyond the expiration of the Manufacturer's Base Warranty Period, may be eligible for a New Equipment Plan.

USED EQUIPMENT PLANS

- Equipment that is less than seven years old and has less than 7,000 machine hours, may be eligible for a Used Equipment Plan.