

ATTACHMENT B- CATEGORY 2

TRACKED LOADERS

If you have different discounts for different sizes of equipment or options, you WILL have to list the items.
If you need more space, attach sheets in the same format as this one.

Brand Name	Model Number	Price Book/Catalog Date of Manufacturer's Current Published Retail Price List	Percentage off discount%
Takeuchi	TL6	1-JAN-2020	18.0%
Takeuchi	TL8	1-JAN-2020	18.0%
Takeuchi	TL8 High Flow	1-JAN-2020	18.0%
Takeuchi	TL10V2	1-JAN-2020	18.0%
Takeuchi	TL10V2 High Flow	1-JAN-2020	18.0%
Takeuchi	TL12V2	1-JAN-2020	18.0%
Takeuchi	TL12V2 High Flow	1-JAN-2020	18.0%
Takeuchi	TL12R2	1-JAN-2020	18.0%
Takeuchi	TL12R2 High Flow	1-JAN-2020	18.0%
Fecon	FTX128L	1-JULY-2020	7.0%
Fecon	FTX128R	1-JULY-2020	7.0%
Fecon	FTX250	1-JULY-2020	7.0%
Fecon	FTX290	1-JULY-2020	7.0%
Fecon	FTX300	1-JULY-2020	7.0%
Fecon	FTX400LGP	1-JULY-2020	7.0%
Fecon	Bull Hog Attachments	1-JULY-2020	11.0%

CONTINUED -ATTACHMENT B -Category 2 TRACK LOADERS

Trade-ins: Yes ☒ No

Installation Charge: \$120.00 per Hour Based on Specification

Hourly labor rate: \$ 120.00

Financing of Lease Purchase interest rate: Market Rate %

Multiple Unit Discount: Yes ☒ No . If yes, please describe:

1% for 3-5 units purchased; 2% for 6 or more

Special Notes:

Takeuchi All Options:

Attachments/Accessories: 9.0 %

Options: 9.0 %

Warranty Offered? Yes ☒ No . See attached for Standard Warranty, Extended

Warranty options and pricing in the back of the Takeuchi machine price catalog.

Fecon:

Attachments/Accessories: 11.0 %

Options: 7.0 %

Warranty Offered? Yes ☒ No . See Attached Standard Warranty, Extended Warranty available upon request .

TAKEUCHI

TL6 Track Loader

519 Bonnie Valentine Way, Pendergrass, GA 30567

Tel: 706-693-3600 Fax: 706-693-3725

www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight: 7485 lbs.	Radial boom design
Overall Width Without Bucket: 5' 0.2"	ROPS/FOPS tilt-up operators compartment w/ rearview mirrors
Tipping Load (SAE 732) 5,269 lbs.	Back-up alarm, Top and rear windows
Rated Operating Capacity (ROC)(SAE J818): 1,841 lbs	Automatic fuel bleed system
Bucket Digging Force: 5,930 lbs.	Pilot operated joystick controls
Horsepower / RPM: 65.2 / 2700	Universal quick attach mounting bracket
Travel Speed: 4 / 6mph	Suspension seat with retractable seatbelt
Auxiliary Flow: 17.8 gpm	One and two way auxiliary hydraulics
Ground Pressure: 4.8 psi	Electronic engine monitoring system
Maximum Lift Height to Bucket Pin: 9' 6.4"	Electrohydraulic push button controls of auxiliary hydraulic circuit
Reach Fully Raised: 1' 10"	Proportional slide switch control auxiliary hydraulics with detent function
Canopy/Cab height: 6' 5"	Hydraulic self-leveling bucket
	Flat face, pressure releasing Hydraulic Couplers
	Standard 14-pin connector with push button control
	Dual element air cleaner
	Push button boom float with detent
	Foot Throttle

EPA Final Tier 4 Turbocharged Engine with DPF

TFM hardware standard equipment, service included through the standard warranty period

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL6R	TL6 with ROPS/FOPS Canopy, Rubber tracks	\$46,791
TL6CR	TL6 with ROPS/FOPS Cab with Air Conditioning/Heat, Defroster, Rubber Tracks, Hydraulic quick attach, Swing out door, AM/FM/MP3 Radio	\$52,213

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

ATTACHMENTS

ABLU-60S-047	60" HD smooth dirt bucket with bolt-on edge, 12.7 cubic feet capacity	\$1,611.00
ABLU-60T-047	60" HD dirt bucket with 7 teeth, 12.7 cubic feet capacity	\$1,579.00
BTL867	67" HD smooth dirt bucket with bolt-on edge, 14.0 cubic feet capacity	\$1,646.93
BTL867T	67" HD dirt bucket with 7 teeth, 14.0 cubic feet capacity	\$1,536.79
BPL1200	7' six way dozer blade	\$6,634.93
BTLPF48	HD 48" pallet forks and frame	\$1,243.07

FIELD INSTALLED OPTIONS

K28843001A	Counter Weight Kit (288 lbs)(ROC: 2039 lbs)	\$0.00
1914199948	3" Retractable seat belt in lieu of standard 2"	\$91.00
K28843005	TL6 hydraulic quick attach coupler kit (for Canopy unit)	2432.36

TAKEUCHI FLEET MANAGEMENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-11
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020

Kirby-Smith Machinery, Inc.





TL8 Track Loader

519 Bonnie Valentine Way, Pendergrass, GA 30567
Tel: 706-693-3600 Fax: 706-693-3725

www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight: 8,445 lbs.
Overall Width Without Bucket: (12"/15" Tracks) 62"/65.4"
Tipping Load (SAE 732) 6,020 lbs.
Rated Operating Capacity (ROC)(SAE J818): 2,105 lbs.
Bucket Digging Force: 6,856 lbs.
Horsepower / RPM: 74.3 / 2,600
Travel Speed: 4.6 / 6.8 mph
Auxiliary Flow: 18.4 gpm
Ground Pressure: 4.4 psi
Maximum Lift Height to Bucket Pin: 9' 11"
Reach Fully Raised: 2' 4.7"
Canopy/Cab height: 6' 11.9" / 7' 4"

Radial boom design
ROPS/FOPS tilt-up operators compartment w/ RH/LH rearview mirrors
Back-up alarm, Top and rear windows
Automatic fuel bleed system
Pilot operated joystick controls
Universal quick attach mounting bracket
Six-way adjustable suspension seat with retractable seatbelt
One and two way auxiliary hydraulics
Electronic engine monitoring system
Electrohydraulic push button controls of auxiliary hydraulic circuit
Proportional slide switch control auxiliary hydraulics with detent function
Hydraulic self-leveling bucket
Flat face, pressure releasing Hydraulic Couplers
Standard 14-pin connector with push button control
Dual element air cleaner with standard pre-cleaner
Push button boom float with detent
Foot Throttle

EPA Final Tier 4 Turbocharged Engine with DPF

Active Power Control (sn 200802489 ~)

TFM hardware standard equipment, service included through the standard warranty period (Canopy: sn 200803984~/Cab: sn 200803863~)

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL8RW	TL8 with ROPS/FOPS Canopy, 15" Rubber tracks	\$53,303
TL8RWP (w/ PC)	TL8RW (above Equipped) with Pattern Control*	\$54,281
TL8CRW	TL8 with ROPS/FOPS Cab with Air Conditioning/Heat, Defroster, 15" Rubber Tracks, Hydraulic quick attach, Roll up door	\$59,483
TL8CRWP (w/ PC)	TL8CRW (above Equipped) with Pattern Control*	\$60,461
<hr/>		
TL8RN	TL8 with ROPS/FOPS Canopy, 12" Rubber tracks	\$52,816
TL8RNP (w/ PC)	TL8RN (above Equipped) with Pattern Control*	\$53,795
TL8CRN	TL8 with ROPS/FOPS Cab with Air Conditioning/Heat, Defroster, 12" Rubber Tracks, Hydraulic quick attach, Roll up door	\$58,996
TL8CRNP (w/ PC)	TL8CRN (above Equipped) with Pattern Control*	\$59,975

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

* PC requires a minimum of 90 days delivery time for factory order

ATTACHMENTS

NOTE: 67" and 76" buckets work with both 12" / 15" Track's

BTL867	67" HD smooth dirt bucket with bolt-on edge, 14.0 cubic feet capacity	\$1,646.93
BTL867T	67" HD dirt bucket with 7 teeth, 14.0 cubic feet capacity	\$1,536.79
ABLU-72S-057	72" Low Profile Bucket - Smooth with Bolt on Cutting Edge	\$1,690.99
ABLU-72T-057	72" Low Profile Bucket - Tooth	\$1,597.63
BTL1076	76" HD smooth dirt bucket with bolt-on edge, 20.3 cubic feet capacity	\$2,139.96
BTL1076T	76" HD dirt bucket with 8 teeth, 20.3 cubic feet capacity	\$1,987.86
BPL1200	7' six way dozer blade	\$6,634.93
BTLPF48	HD 48" pallet forks and frame	\$1,243.07
K28854701I	Radio kit installed (AM/FM/MP3)	\$500.00
K28854204I	3-point 2" seat belt kit Installed (in lieu of standard 2")	\$193.13

FIELD INSTALLED OPTIONS

1914199948	3" Retractable seat belt in lieu of standard 2"	\$91.00
K48834204	3-point 2" seat belt kit in lieu of standard 2"	\$150.00
K28833001	Counter Weight Kit TL8 (350 lbs)(Increase ROC to 2,323 lb)	\$900.00
K488710000	H pattern fixed control kit for TL8	\$353.00
K48837001	TL8 hydraulic quick attach coupler kit (for Canopy unit)	\$1,575.60
K28854701	Radio kit (AM/FM/MP3)	\$421.00
1903908050	Active Power Control Kit (Field Kit)(for SN 200800001 ~ 200802488)	\$440.00

TAKEUCHI FLEET MANAGEMENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-12-A
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020



Takeuchi

TL8 Track Loader HIGH FLOW

519 Bonnie Valentine Way, Pendergrass, GA 30567
Tel: 706-693-3600 Fax: 706-693-3725

www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight: 8,631 lbs.	Radial boom design
Overall Width Without Bucket (w/ 15" Tracks): 65.4"	Tilt-up operators compartment w/ RH/LH rearview mirrors
Tipping Load (SAE 732): 6,020 lbs.	Back-up alarm, Top and rear windows
Rated Operating Capacity (ROC)(SAE J818): 2,105 lbs	Automatic fuel bleed system
Bucket Digging Force: 6,856 lbs.	Pilot operated joystick controls
Horsepower / RPM: 74.3 / 2,600	Universal quick attach mounting bracket
Travel Speed: 4.6 / 6.8 mph	Six-way adjustable suspension seat with retractable seatbelt
Auxiliary Flow: 18.4 gpm STD / 33 gpm HF	One and two way auxiliary hydraulics
Ground Pressure: 4.5 psi	Electronic engine monitoring system
Maximum Lift Height to Bucket Pin: 9' 11"	Electrohydraulic push button controls of auxiliary hydraulic circuit
Reach Fully Raised: 2' 4.7"	Proportional slide switch control auxiliary hydraulics with detent function
Cab height: 7' 4"	Hydraulic self-leveling bucket
	1/2" Flat face, pressure relieving Hydraulic Couplers
1/2" Lexan roll up door	Standard 14-pin connector with push button control
EPA Final Tier 4 turbocharged engine with DPF	Dual element air cleaner with standard pre-cleaner
ROPS/FOPS Level 2 on High Flow	Push button boom float with detent
	Foot throttle

TFM hardware standard equipment, service included through the standard warranty period (Cab: sn 200803863~)

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL8CRWH	TL8 with ROPS/FOPS Cab with Air Conditioning/Heat, Defroster, 15" Rubber Tracks, Hydraulic quick attach, Lexan Roll up door and HIGH FLOW auxiliary hydraulics (33 gpm)	\$62,315
TL8CRWHP (w/ PC)	TL8CRW (above Equipped) with Pattern Control*	\$63,294

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

* PC requires a minimum of 90 days delivery time for factory order

ATTACHMENTS

BTL867	67" HD smooth dirt bucket with bolt-on edge, 14.0 cubic feet capacity	\$1,646.93
BTL867T	67" HD dirt bucket with 7 teeth, 14.0 cubic feet capacity	\$1,536.79
ABLU-72S-057	72" Low Profile Bucket - Smooth with Bolt on Cutting Edge	\$1,690.99
ABLU-72T-057	72" Low Profile Bucket - Tooth	\$1,597.63
BTL1076	76" HD smooth dirt bucket with bolt-on edge, 20.3 cubic feet capacity	\$2,139.96
BTL1076T	76" HD dirt bucket with 8 teeth, 20.3 cubic feet capacity	\$1,987.86
BPL1200	7' six way dozer blade	\$6,634.93
BTLPF48	HD 48" pallet forks and frame	\$1,243.07
K28854701I	Radio kit installed (AM/FM/MP3)	\$500.00
K28854204I	3-point 2" seat belt kit Installed (in lieu of standard 2")	\$193.13

FIELD TALLED OPTIONS

1914199948	3" Retractable seat belt in lieu of standard 2"	\$91.00
K48834204	3-point 2" seat belt kit in lieu of standard 2"	\$150.00
K28833001	Counter Weight Kit TL8 (350 lbs)(Increase ROC to 2,323 lb)	\$900.00
K488710000	H pattern fixed control kit for TL8	\$353.00
K28854701	Radio kit (AM/FM/MP3)	\$420.70
1903908050	Active Power Control Kit (Field Kit)	\$440.00

TA CH T MAN IENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-12-B
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020

TAKEUCHI

TL10V2

Track Loader

519 Bonnie Valentine Way, Pendergrass, GA 30567
Tel: 706-693-3600 Fax: 706-693-3725
www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight: 9,950 lbs.	Vertical boom design
Overall Width Without Bucket: 5' 8.5"	Tilt-up operators compartment
Tipping Load (SAE 732) 7,205 lbs.	Electronic dial type throttle and foot throttle
Rated Operating Capacity (ROC)(SAE J818): 2,522 lbs	Back-up alarm
Bucket Digging Force: 6,520 lbs.	Top and rear windows
Horsepower / RPM: 74.3 / 2,800	Automatic fuel bleed system
Travel Speed: 4.8 / 7.0	Pilot operated joystick controls
Auxiliary Flow: 18.8 gpm	Universal quick attach mounting bracket
Ground Pressure: 4.9 PSI	Deluxe high back suspension seat with retractable seatbelt
Maximum Lift Height to Bucket Pin: 10' 4.8"	One and two way auxiliary hydraulics
Reach Fully Raised: 3' 1.4"	Electronic engine monitoring system
Canopy/Cab height: 7' 5.4"	Electrohydraulic push button controls of auxiliary hydraulic circuit
Selectable working modes	Proportional thumb wheel control auxiliary hydraulics with detent function
Front & rear LED working lights	Hydraulic self-leveling bucket
ROPS/FOPS Level 1 operator protection	Flat face, pressure relieving Hydraulic Couplers
Multi function color monitor	Standard 14-pin connector with push button control
Active power control power management system	Dual element air cleaner
	Push button boom float with detent

TFM hardware standard equipment, service included through the standard warranty period

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL10V2-R	TL10 with ROPS/FOPS Canopy, 15.7" Rubber tracks	\$65,100
TL10V2-RR (w/ RC)	TL10R (above Equipped) with Ride Control*	\$65,800
TL10V2-RP (w/ PC)	TL10R (above Equipped) with Pattern Control*	\$66,050
TL10V2-RRP (w/ RC & PC)	TL10R (above Equipped) with Ride Control & Pattern Control*	\$66,750
TL10V2-CR	TL10 with ROPS/FOPS Cab with Air Conditioning/Heat, Defroster, 15.7" Rubber Tracks, Hydraulic quick attach, Roll up door, AM/FM/MP3 Radio	\$71,500
TL10V2-CRR (w/ RC)	TL10CR (above Equipped) with Ride Control*	\$72,200
TL10V2-CRP (w/ PC)	TL10CR (above Equipped) with Pattern Control*	\$72,450
TL10V2-CRRP (w/ RC & PC)	TL10CR (above Equipped) with Ride Control & Pattern Control*	\$73,150

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

* PC & RC requires a minimum of 90 days delivery time for factory order

ATTACHMENTS / OPTIONS

BTL1076	76" HD smooth dirt bucket with bolt-on edge, 20.3 cubic feet capacity	\$2,139.96
BTL1076T	76" HD dirt bucket with 8 teeth, 20.3 cubic feet capacity	\$1,987.86
BPL1200	7' six way dozer blade	\$6,634.93
BTLPF48	HD 48" pallet forks and frame	\$1,243.07
K28854204I	3-point 2" seat belt kit Installed (in lieu of standard 2")	\$193.13

FIELD INSTALLED OPTIONS

K28843001B	Counter Weight Kit (288 lbs) (ROC: 2,716 lbs)	\$1,300.00
19141-99948	3" retractable seat belt in lieu of standard 2"	\$91.00
K48847001	Hydraulic quick attach coupler kit (for Canopy unit)	\$1,998.87

TAKEUCHI FLEET MANAGEMENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-13-A
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020

TAKEUCHI

TL10V2

Track Loader

HIGH FLOW

519 Bonnie Valentine Way, Pendergrass, GA 30567

Tel: 706-693-3600 Fax: 706-693-3725

www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight: 10,270 lbs.
Overall Width Without Bucket: 5' 8.5"
Tipping Load (SAE 732) 7,205 lbs.
Rated Operating Capacity (ROC)(SAE J818): 2,522 lbs
Bucket Digging Force: 6,520 lbs.
Horsepower / RPM: 74.3 / 2,600
Travel Speed: 4.8 / 7.0
Auxiliary Flow (SP1): 18.8 gpm STD / 32.8 gpm HF
Ground Pressure: 5.1 PSI
Maximum Lift Height to Bucket Pin: 10' 4.8"
Reach Fully Raised: 3' 1.4"
Cab height: 7' 6.9"

Front & rear LED working lights
ROPS / FOPS Level 2 operator protection
Multi function color monitor

Vertical boom design
Tilt-up operators compartment
Electronic dial type throttle and foot throttle
Back-up alarm
Top and rear windows
Automatic fuel bleed system
Pilot operated joystick controls
Universal quick attach mounting bracket
Deluxe high back suspension seat with retractable seatbelt
One and two way auxiliary hydraulics
Electronic engine monitoring system
Electrohydraulic push button controls of auxiliary hydraulic circuit
Proportional thumb wheel control auxiliary hydraulics with detent function
Hydraulic self-leveling bucket
Flat face, pressure relieving Hydraulic Couplers
Standard 14-pin connector with push button control
Dual element air cleaner
Push button boom float with detent

TFM hardware standard equipment, service included through the standard warranty period

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL10V2-CRH	TL10 with Cab with Air Conditioning/Heat, Defroster, 15.7" Rubber Tracks, Hydraulic quick attach, Roll up Lexan door, AM/FM/MP3 Radio, HIGH FLOW Auxiliary Hydraulics w/ second auxillary line	\$74,550
TL10V2-CRHR (w/ RC)	TL10CRH (above Equipped) with Ride Control*	\$75,250
TL10V2-CRHP (w/ PC)	TL10CRH (above Equipped) with Pattern Control*	\$75,500
TL10V2-CRHRP (w/ RC & PC)	TL10CRH (above Equipped) with Ride Control & Pattern Control*	\$76,200

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

* PC & RC requires a minimum of 90 days delivery time for factory order

ATTACHMENTS / OPTIONS

BTL1076	76" HD smooth dirt bucket with bolt-on edge, 20.3 cubic feet capacity	\$2,139.96
BTL1076T	76" HD dirt bucket with 8 teeth, 20.3 cubic feet capacity	\$1,987.86
BPL1200	7' six way dozer blade	\$6,634.93
BTLPF48	HD 48" pallet forks and frame	\$1,243.07
K28854204I	3-point 2" seat belt kit Installed (in lieu of standard 2")	\$193.13

FIELD INSTALLED OPTIONS

19141-99948	3" retractable seat belt in lieu of standard 2"	\$91.00
K28843001B	Counter Weight Kit (288 lbs) (ROC: 2,716 lbs)	\$1,300.00

TAKEUCHI FLEET MANAGEMENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-13-B
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020

TAKEUCHI

TL12R2

Track Loader

519 Bonnie Valentine Way, Pendergrass, GA 30567
Tel: 706-693-3600 Fax: 706-693-3725
www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight: 12,300 lbs.	Radial boom design
Overall Width Without Bucket: 6' 5.2"	Tilt-up operators compartment
Tipping Load (SAE 732) 8,629 lbs.	Electronic dial type throttle and foot throttle
Rated Operating Capacity (ROC)(SAE J816): 2,975 lbs	Back-up alarm
Bucket Digging Force: 8,210 lbs.	Top and rear windows
Horsepower / RPM: 111.3 / 2,400	Automatic fuel bleed system
Travel Speed: 5.0 / 7.8 mph	Pilot operated joystick controls
Auxiliary Flow: 23.2 gpm	Universal quick attach mounting bracket
Ground Pressure: 4.58 psi	Deluxe high back suspension seat with retractable seatbelt
Maximum Lift Height to Bucket Pin: 10' 6"	One and two way auxiliary hydraulics
Reach Fully Raised: 3' 1.8"	Electronic engine monitoring system
Canopy/Cab height: 7' 7"	Electrohydraulic push button controls of auxiliary hydraulic circuit
Active power control power management system	Proportional thumb wheel control auxiliary hydraulics with detent function
Front & rear LED working lights	Hydraulic self-leveling bucket
ROPS/FOPS Level 1 operator protection	Flat face, pressure relieving Hydraulic Couplers
Multi function color monitor	Standard 14-pin connector with push button control
Selectable working modes	Dual element air cleaner
	Push button boom float with detent

TFM hardware standard equipment, service included through the standard warranty period

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL12R2-R	TL12 with Canopy, 17.7" Rubber tracks	\$80,500
TL12R2-RR (w/ RC)	TL12R (above Equipped) with Ride Control*	\$81,200
TL12R2-RP (w/ PC)	TL12R (above Equipped) with Pattern Control*	\$81,450
TL12R2-RRP (w/ RC & PC)	TL12R (above Equipped) with Ride Control & Pattern Control*	\$82,150

TL12R2-CR	TL12 with ROPS/FOPS Cab with Air Conditioning/Heat, Defroster, 17.7" Rubber Tracks, Hydraulic quick attach, Roll up door, AM/FM/MP3 Radio	\$87,050
TL12R2-CRR (w/ RC)	TL12CR (above Equipped) with Ride Control*	\$87,750
TL12R2-CRP (w/ PC)	TL12CR (above Equipped) with Pattern Control*	\$88,000
TL12R2-CRRP (w/ RC & PC)	TL12CR (above Equipped) with Ride Control & Pattern Control*	\$88,700

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

* PC & RC requires a minimum of 90 days delivery time for factory order

ATTACHMENTS / OPTIONS

BTL1280	80" HD smooth dirt bucket with bolt-on edge, 24.0 cu ft. capacity	\$2,381.23
BTL1280T	80" HD dirt bucket with 9 teeth 24.0 cu.ft. capacity	\$2,197.66
ABLU-84S-100	84" High Capacity - HD Dirt Bucket - Smooth with bolt-on edge, 27 cu.ft. capacity	\$2,695.93
ABLU-84T-100	84" High Capacity - HD Dirt Bucket - Tooth	\$2,593.13
BPL12008	8' six way dozer blade	\$6,818.50
BTLPF48	HD 48" pallet forks and frame	\$1,243.07

FIELD INSTALLED OPTIONS

19141-99948	3" retractable seat belt in lieu of standard 2"	\$91.00
1914100145	3-point 2" seat belt kit in lieu of standard 2"	\$262.60
K48867001	Hydraulic quick attach coupler kit (for Canopy unit)	\$1,998.87

TAKEUCHI FLEET MANAGEMENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-14-A
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020

Kirby-Smith Machinery, Inc.



TAKEUCHI

TL12R2

Track Loader

HIGH FLOW

519 Bonnie Valentine Way, Pendergrass, GA 30567

Tel 706-693-3600 Fax: 706-693-3725

www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight: 12,590 lbs.	Radial boom design
Overall Width Without Bucket: 6' 5.2"	Tilt-up operators compartment
Tipping Load (SAE 732) 8,629 lbs.	Electronic dial type throttle and foot throttle
Rated Operating Capacity (ROC)(SAE J818): 2,975 lbs	Back-up alarm
Bucket Digging Force: 8,210 lbs.	Top and rear windows
Horsepower / RPM: 111.3 / 2,400	Automatic fuel bleed system
Travel Speed: 5.0 / 7.8 mph	Pilot operated joystick controls
Auxiliary Flow (SP1): 23.2 gpm STD / 40.4 gpm HF	Universal quick attach mounting bracket
Auxiliary Flow (SP2): 23.2 gpm	Deluxe high back suspension seat with retractable seatbelt
Ground Pressure: 4.68 psi	One and two way auxiliary hydraulics
Maximum Lift Height to Bucket Pin: 10' 6"	Electronic engine monitoring system
Reach Fully Raised: 3' 1.8"	Electrohydraulic push button controls of auxiliary hydraulic circuit
Cab height: 7' 9.7"	Proportional thumb wheel control auxiliary hydraulics with detent function
Active power control power management system	Hydraulic self-leveling bucket
Front & rear LED working lights	Flat face, pressure relieving Hydraulic Couplers
ROPS / FOPS Level 2 operator protection	Standard 14-pin connector with push button control
Multi function color monitor	Dual element air cleaner
Selectable working modes	Push button boom float with detent
TFM hardware standard equipment, service included through the standard warranty period	

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL12R2-CRH	TL12 with Cab with Air Conditioning/Heat, Defroster, 17.7" Rubber Tracks, Hydraulic quick attach, Roll up Lexan door, AM/FM/MP3 Radio, HIGH FLOW Auxiliary Hydraulics w/ second auxiliary line	\$90,050
TL12R2-CRHR (w/ RC)	TL12CRH (above Equipped) with Ride Control*	\$90,750
TL12R2-CRHP (w/ PC)	TL12CRH (above Equipped) with Pattern Control*	\$91,000
TL12R2-CRHRP (w/ RC & PC)	TL12CRH (above Equipped) with Ride Control & Pattern Control*	\$91,700

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

* PC & RC requires a minimum of 90 days delivery time for factory order

ATTACHMENTS / OPTIONS

BTL1280	80" HD smooth dirt bucket with bolt-on edge, 24.0 cu ft. capacity	\$2,381.23
BTL1280T	80" HD dirt bucket with 9 teeth 24.0 cu.ft. capacity	\$2,197.66
ABLU-84S-100	84" High Capacity - HD Dirt Bucket - Smooth with bolt-on edge, 27 cu.ft. capacity	\$2,695.93
ABLU-84T-100	84" High Capacity - HD Dirt Bucket - Tooth	\$2,593.13
BPL12008	8' six way dozer blade	\$6,818.50
BTLPF48	HD 48" pallet forks and frame	\$1,243.07

FIELD TALLIED OPTIONS

1914199948	3" retractable seat belt in lieu of standard 2"	\$91.00
1914100145	3-point 2" seat belt kit in lieu of standard 2"	\$262.60

TAKEUCHI FLEET MANAGEMENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-14-B
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020

Kirby-Smith Machinery, Inc.



Takeuchi

TL12V2 Track Loader

519 Bonnie Valentine Way, Pendergrass, GA 30567
Tel: 706-693-3800 Fax: 706-693-3725
www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight (Canopy/Cab): 12,860 lb / 13,190 lb	Vertical boom design
Overall Width Without Bucket: 6' 5.2"	Tilt-up operators compartment
Tipping Load (SAE 732) 11,737 lbs.	Electronic dial type throttle and foot throttle
Rated Operating Capacity (ROC)(SAE J818): 4,107 lbs	Back-up alarm
Bucket Digging Force: 7,874 lbs.	Top and rear window
Horsepower / RPM: 111.3 / 2,400	Automatic fuel bleed system
Travel Speed: 5.0 / 7.8 mph	Pilot operated joystick controls
Auxiliary Flow: 23.2 gpm	Universal quick attach mounting bracket
Ground Pressure (Canopy / Cab): 4.8 psi / 4.9 psi	Deluxe high back suspension seat with retractable seatbelt
Maximum Lift Height to Bucket Pin: 10' 10"	One and two way auxiliary hydraulics
Reach Fully Raised: 3' 0.4"	Electronic engine monitoring system
Canopy/Cab height: 7' 7.7"	Electrohydraulic push button controls of auxiliary hydraulic circuit
ROPS/FOPS Level 1 operators protection	Proportional slide switch control auxiliary hydraulics with detent function
Front & rear LED working lights	Hydraulic self-leveling bucket
Selectable working modes	Flat face, pressure relieving hydraulic couplers
Active power control power management system	Standard 14-pin connector with push button control
Multi function color monitor	Dual element air cleaner
	Push button boom float with detent

TFM hardware standard equipment, service included through the standard warranty period

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL12V2-R	TL12V with Canopy, 17.7" Rubber tracks	\$83,500
TL12V2-RR (w/ RC)	TL12VR (above Equipped) with Ride Control*	\$84,200
TL12V2-RP (w/ PC)	TL12VR (above Equipped) with Pattern Control*	\$84,450
TL12V2-RRP (w/ RC & PC)	TL12VR (above Equipped) with Ride Control & Pattern Control*	\$85,150

TL12V2-CR	TL12V with ROPS/FOPS Cab, Air Conditioning/Heat, Defroster, AM/FM/MP3 Radio, 17.7" Rubber Tracks, Hydraulic quick attach, Roll up door	\$90,050
TL12V2-CRR (w/ RC)	TL12VCR (above Equipped) with Ride Control*	\$90,750
TL12V2-CRP (w/ PC)	TL12VCR (above Equipped) with Pattern Control*	\$91,000
TL12V2-CRRP (w/ RC & PC)	TL12VCR (above Equipped) with Ride Control & Pattern Control*	\$91,700

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

* PC & RC requires a minimum of 90 days delivery time for factory order

ATTACHMENTS / OPTIONS

BTL1280	80" HD smooth dirt bucket with bolt-on edge, 24.0 cu ft. capacity	\$2,381.23
BTL1280T	80" HD dirt bucket with 9 teeth 24.0 cu.ft. capacity	\$2,197.66
ABLU-84S-100	84" High Capacity - HD Dirt Bucket - Smooth with bolt-on edge, 27 cu.ft. capacity	\$2,695.93
ABLU-84T-100	84" High Capacity - HD Dirt Bucket - Tooth - 27 cu.ft. capacity	\$2,593.13
BPL12008	8' six way dozer blade	\$6,818.50
BTLPF48	HD 48" pallet forks and frame	\$1,243.07

FIELD INSTALLED OPTIONS

1914199948	3" retractable seat belt in lieu of standard 2"	\$91.00
1914100145	3-point 2" seat belt kit in lieu of standard 2"	\$262.60
K48857001	Hydraulic quick attach coupler kit (for Canopy unit)	\$1,998.87

TAKEUCHI FLEET MANAGEMENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-15-A
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020

Kirby-Smith Machinery, Inc.



TAKEUCHI

TL12V2

Track Loader

HIGH FLOW

519 Bonnie Valentine Way, Pendergrass, GA 30567

Tel: 706-693-3600 Fax: 706-693-3725

www.takeuchi-us.com

STANDARD EQUIPMENT

Operating Weight: 13,190 lbs.	Vertical boom design
Overall Width Without Bucket: 6' 5.2"	ROPS/FOPS tilt-up operators compartment
Tipping Load (SAE 732) 11,737 lbs.	Electronic dial type throttle and foot throttle
Rated Operating Capacity (ROC)(SAE J818): 4,107 lbs	Back-up alarm
Bucket Digging Force: 7,874 lbs.	Top and rear window
Horsepower / RPM: 111.3 / 2,400	Automatic fuel bleed system
Travel Speed: 5.0 / 7.8 mph	Pilot operated joystick controls
Auxiliary Flow (Std / High Flow): 23.2 gpm / 40.4 gpm	Universal quick attach mounting bracket
Ground Pressure: 4.9 psi	Deluxe high back suspension seat with retractable seatbelt
Maximum Lift Height to Bucket Pin: 10' 10"	One and two way auxiliary hydraulics
Reach Fully Raised: 3' 0.4"	Electronic engine monitoring system
Cab height: 7' 9.7"	Electrohydraulic push button controls of auxiliary hydraulic circuit
ROPS/FOPS Level 2 operators protection	Proportional slide switch control auxiliary hydraulics with detent function
Front & rear LED working lights	Hydraulic self-leveling bucket
Selectable working modes	Flat face, pressure relieving hydraulic couplers
Active power control power management system	Standard 14-pin connector with push button control
Multi function color monitor	Dual element air cleaner
	Push button boom float with detent

TFM hardware standard equipment, service included through the standard warranty period

BASE MACHINE WITH STANDARD EQUIPMENT

Factory Code	Description	Suggested List Price
TL12V2-CRH	TL12 with Cab with Air Conditioning/Heat, Defroster, AM/FM/MP3 Radio, 17.7" Rubber Tracks, Hydraulic quick attach, Roll up Lexan door HIGH FLOW Auxiliary Hydraulics w/ second auxiliary line	\$93,050
TL12V2-CRHR (w/ RC)	TL12VCRH (above Equipped) with Ride Control*	\$93,750
TL12V2-CRHP (w/ PC)	TL12VCRH (above Equipped) with Pattern Control*	\$94,000
TL12V2-CRHRP (w/ RC & PC)	TL12VCRH (above Equipped) with Ride Control & Pattern Control*	\$94,700

BASE MACHINE PRICE DOES NOT INCLUDE A BUCKET

* PC & RC requires a minimum of 90 days delivery time for factory order

ATTACHMENTS / OPTIONS

BTL1280	80" HD smooth dirt bucket with bolt-on edge, 24.0 cu ft. capacity	\$2,381.23
BTL1280T	80" HD dirt bucket with 9 teeth 24.0 cu.ft. capacity	\$2,197.66
ABLU-84S-100	84" High Capacity - HD Dirt Bucket - Smooth with bolt-on edge, 27 cu.ft. capacity	\$2,695.93
ABLU-84T-100	84" High Capacity - HD Dirt Bucket - Tooth - 27 cu.ft. capacity	\$2,593.13
BPL12008	8' six way dozer blade	\$6,818.50
BTLPF48	HD 48" pallet forks and frame	\$1,243.07

FIELD INSTALLED OPTIONS

1914199948	3" retractable seat belt in lieu of standard 2"	\$91.00
1914100145	3-point 2" seat belt kit in lieu of standard 2"	\$262.60

TAKEUCHI FLEET MANAGEMENT

TFMS1YR	1 Year Takeuchi Fleet Management Subscription*	\$180
TFMS2YR	2 Year Takeuchi Fleet Management Subscription*	\$340
TFMS3YR	3 Year Takeuchi Fleet Management Subscription*	\$500

* Added to the first 2 years that come standard

Prices and specifications
subject to change without notice

P-15-B
Prices are in US Dollar

Prices are F.O.B. Pendergrass, GA
Effective 1 January 2020

Kirby-Smith Machinery, Inc.



Fecon® Bull Hog® Skid Steer

Included with a Skid Steer Unit:

- Universal Skid Steer Mount
- Hydraulic Protection Block
- FGT Rotor System
- Adjustable Grabber Push Bar
- Hydraulic Motor
- Hydraulic Lines for Motor Drive with QD Fittings

Model	Overall Width	Working Width	GPM	Weight	Rotor Bearings	Fixed Motor List Price	Variable Motor List Price
BH62SS	63"	50"	24 - 45	2350 lbs.	ST65mm	\$27,790	\$30,390
BH74SS	74"	61"	24 - 45	2650 lbs.	ST65mm	\$30,290	\$32,990
BH85SS	85"	72"	24 - 45	2800 lbs.	ST65mm	\$33,990	\$36,890

Factory Installed Options:	BH62SS	BH74SS	BH85SS
DCR Rotor w/Viking Axe only	\$3,290	\$3,290	\$4,490
HDT Rotor w/Double Carbide Tools	\$690	\$790	\$890
Hydraulic Rotor Brake (63cc or 107cc motor)	\$690	\$690	\$690
Pressure Gauge for BH62SS, BH74SS, BH85SS	\$440	\$440	\$440
Hydraulic Rooftop Cooler	\$4,490	\$4,490	\$4,490
Rooftop Cooler Takeuchi mounting kit (TL10 and TL12)	\$590	\$590	\$590
Rooftop Cooler Bobcat mounting kit (T770/T870)	\$690	\$690	\$690

Factory Installed Options: (separate option on the order)	BH62SS	BH74SS	BH85SS
Trap door with auxiliary low flow control	\$2,590	\$2,590	\$2,590
Trap door with single function electric hydraulic valve control	\$2,690	\$2,690	\$2,690
Trapdoor Configuration with Bobcat controller	\$3,390	\$3,390	\$3,390

Factory Installed Options:	List Price
Mounting Plate & Push Bar – Avant / Tool Carrier	Call for details
Mounting Plate & Push Bar – Remote mulcher	Call for details
Cubit Carbide Teeth (22 tools upcharge amount) P/N 501-15-006	+\$396

Notes:

1. Prices include installation at factory on new units.
2. Fecon Bull Hog® mulchers are rated up to 6000 PSI.
3. Buyer is responsible for ensuring carrier has enough low flow circuits and controls for options.
4. Actual Weights will vary based on options selected.
5. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade prices.



Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Kirby-Smith Machinery, Inc.



Fecon® Bull Hog® Standard Flow

Included with a Skid Steer Unit:

- Universal Skid Steer Mount
- Hydraulic Protection Block
- Hydraulic Motor
- Hydraulic Lines for Motor Drive with QD Fittings
- Push Bar
- Internal Plumbing

Model	Cutting Width	Overall Width	Cutting Width	GPM	Weight	Rotor Bearings	List Price
Fecon RK5015	50"	61"	50"	17-27	1370lbs.	ST65mm	\$18,900

Factory Installed Options:	List Price
Fecon® Hydraulic Cooler	\$4,490
Fecon® Lexan Windshield/Door *	\$1,090
Cubit Carbide Teeth (22 tools upcharge amount) P/N 501-15-006	+\$396

Notes:

1. Prices include installation at factory on new units.
2. Buyer is responsible for ensuring carrier has enough low flow circuits and controls for options.
3. Requires case drain line
4. * Lexan requires existing hardware & gasket.
5. Actual Weights will vary based on options selected.
6. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade prices.



Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPS & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Kirby-Smith Machinery, Inc.



Fecon® Bull Hog® Blackhawk

Included with a Skid Steer Unit:

- Universal Skid Steer Mount
- Hydraulic Protection Block
- Hydraulic Motor
- Hydraulic Lines for Motor Drive with QD Fittings
- Push Bar
- Internal Plumbing

Model	Cutting Width	Overall Width	Weight	Flow Range	Height	Pressure	Tools	List Price
Fecon BK7618	76"	91"	2,840 lbs.	Max 45 gpm	56" w/ push bar	Max 6,000 psi	30	\$35,990

Factory Installed Options:	List Price
Fecon® Hydraulic Cooler	\$4,490
Fecon® Lexan Windshield/Door *	\$1,090

Notes:

1. Prices include installation at factory on new units.
2. Buyer is responsible for ensuring carrier has enough low flow circuits and controls for options.
3. Requires case drain line.
4. * Lexan requires existing hardware & gasket.
5. Actual Weights will vary based on options selected.
6. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade prices.



Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements. Prices and specifications subject to change without notice. Auxiliary equipment options or attachments not listed, may be quoted upon request. Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Kirby-Smith Machinery, Inc.

Fecon® Bull Hog® Hydraulic Ground

Included with Hydraulic Ground Units:

- Hydraulic Motor
- Push Bar (Configuration Will Vary By Model)
- Hydraulic Protection Kit
- Internal Plumbing
- Integrated Mount (For Most Carriers)
- Trap Door (On Most Models)



Model	Overall Width	Work Width	Body Style	Trap Door	Max HP	GPM	Rotor Bearing	Motors	Weight	List Price
BH74SD-3 (SS mount)	76"	61"	CSD	Optional	175	27 – 50	SD65mm	1 x 107V	2750 lbs.	\$35,990
BH74SD-4 (SS mount)	76"	61"	CSD	Optional	225	50 – 65	SD65mm	1 x 160V	2800 lbs.	\$40,990
BH85SD-3 (SS mount)	87"	72"	CSD	Optional	175	27 – 50	SD65mm	1 x 107V	2970 lbs.	\$37,990
BH85SD-4 (SS mount)	87"	72"	CSD	Optional	225	50 – 65	SD65mm	1 x 160V	3050 lbs.	\$44,290
BH120H-3	100"	86"	SD	Yes	300	50–100	SD65mm	2 x 107V	4800 lbs.	\$73,290
BH120H-4	100"	86"	SD	Yes	310	100-140	SD65mm	2 x 160V	4950 lbs.	\$77,100
BH200HxD-3	102"	85"	SD	Yes	400	50–100	SD90mm	2 x 107V	5870 lbs.	\$83,490
BH200HxD-4	102"	85"	SD	Yes	400	100-150	SD90mm	2 x 160V	5970 lbs.	\$87,490
BH230HxD-3	117"	100"	SD	Yes	400	50–100	SD90mm	2 x 107V	6750 lbs.	\$87,990
BH230HxD-4	117"	100"	SD	Yes	400	100-150	SD90mm	2 x 160V	6850 lbs.	\$90,790
BH300HxD-3	109"	89"	SD	Yes	350	80–100	SD90mm	2 x 107V	7710 lbs.	\$99,390
BH300HxD-4	109"	89"	SD	Yes	600	100–150	SD90mm	2 x 160V	7850 lbs.	\$102,990
BH300HxD-5	109"	89"	SD	Yes	600	180–210	SD90mm	2 x 280V	7950 lbs.	\$120,490

Factory Installed Options:	List Price
Hydraulic Tilting Push Bar for BH120H – BH350H Models	\$2,890
DCR Rotor w/Viking Axe only for BH74 – All Configurations	\$3,290
DCR Rotor w/Viking Axe only for BH85 – All Configurations	\$4,490
DCR Rotor w/Viking Axe only BH120 – All Configurations	\$5,490
DCR Rotor w/Viking Axe only BH200 – All Configurations	\$5,990
DCR Rotor w/Viking Axe only BH230 – All Configurations	\$6,990

Factory Installed Options: (separate option on the order)	List Price
Trap Door for BH74SD, BH85SD	\$2,590

Notes:

1. Maximum flow is based on 6000 PSI operating pressure. Consult factory for custom configurations.
2. Motors with "V" denote variable displacement motor. Variable displacement motors afford benefit within rated GPM.
3. Actual weights will vary based on motor, mount and options selected.
4. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade prices
5. Labor, parts or materials required for field installations not included. Does not include plumbing to the carrier or controls to activate tilt function. Includes hydraulic tilt cylinders and rake teeth on push bar; all installed at factory.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Kirby-Smith Machinery, Inc.



Fecon® Bull Hog® PTO

Included with PTO Units:

- Three-Point Hitch
- Push Bar
- Hydraulic Trap Door
- Hydraulic Top Link
- PTO Shaft
- Slip Clutch and Over Running Clutch (in most models)



Model	Width	Work Width	Body Style	Trap Door	Push Bar	HP	PTO RPM	PTO Shaft	Gear Box	Rotor Bearing	Clutch	Weight	List Price
BH74	74"	61"	ST	Yes	PPB	80-90	540	1.375"	Rigid	ST65mm	On PTO Shaft	2800 lbs.	\$31,390
BH74	74"	61"	ST	Yes	PPB	90-40	1000	1.375"	Rigid	ST65mm	On PTO Shaft	2800 lbs.	\$31,390
BH85	85"	72"	ST	Yes	PPB	80- 90	540	1.375"	Rigid	ST65mm	On PTO Shaft	3000 lbs.	\$32,290
BH85	85"	72"	ST	Yes	PPB	90-140	1000	1.375"	Rigid	ST65mm	On PTO Shaft	3000 lbs.	\$32,290
BH99	101"	86"	ST	Yes	PPB	90-140	1000	1.75"	Rigid	ST65mm	On PTO Shaft	3800 lbs.	\$38,990
BH120-P	100"	86"	SD	Yes	HYB	140-185	1000	1.75"	Pivoting	SD65mm	On PTO Shaft	4900 lbs.	\$58,990
BH200-PX	102"	85"	SD	Yes	HYB	140-450	1000	1.75"	Pivoting	SD90mm	Inside Head	6000 lbs.	\$69,990

Factory Installed Options: (within top level part number)	List Price
DCR Rotor w/Viking Axe only for BH74 – All Configurations	\$3,290
DCR Rotor w/Viking Axe only for BH85 – All Configurations	\$4,490
DCR Rotor w/Viking Axe only for BH99-120 – All Configurations	\$5,490
DCR Rotor w/Viking Axe only for BH200 – All Configurations	\$5,990
Gearbox Cooler Option for over 300 HP	\$5,790

Notes:

1. BH200 unit requires gear box cooling over 300HP. Call for quote.
2. BH200 unit comes equipped as standard with hydraulic tilting push bar.
3. Models with "P" in the model name have a pivoting gear box and synchronization bar.
4. Models without "P" in model name have fixed-position gear boxes.
5. Actual Weights will vary based on options selected.
6. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade prices.
7. Labor, parts or materials required for field installations not included. Does not include plumbing to the carrier or controls to activate tilt function.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Bull Hog® Excavator

Included with Excavator Units:

- Hydraulic Motor(s)
- Hydraulic Protection Kit
- Internal Plumbing From Motor(s) to The Bulkhead and Protection Block
- Mount Riser or Pin-On Mount Plate
- Bolt-On Mount

Model	Overall Width	Work Width	GPM	Rotor Bearing	Motors	Weight	EXC Class***	List Price
FMX36	44"	36"	12-40 @ 4,000 PSI	ST65mm	1 x 45V	850 lbs.	5 - 10 t	\$17,390
FMX50	58"	50"	12-40 @ 4,000 PSI	ST65mm	1 x 45V	1050 lbs.	5 - 10 t	\$18,590
CEM36(*) (**)	46"	36"	17 - 30	ST65mm	1 x 55V*	1475 lbs.	7 - 15 t	\$24,790
Standard Duty								
BH47EXC-2V	50"	37"	27 - 50	ST65mm	1 x 107V	2400 lbs.	12 - 20 t	\$42,290
BH62EXC-2V	63"	50"	27 - 50	ST65mm	1 x 107V	2650 lbs.	12 - 20 t	\$43,790
BH62EXC-3V	63"	50"	40 - 70	ST65mm	1 x 160V	2750 lbs.	12 - 20 t	\$47,890
Severe Duty								
BH40EXC-1-2-SDV**	51"	36"	30 - 50	SD65mm	1 x 107V	3150 lbs.	15 - 40 t	\$47,390
BH40EXC-3-SDV**	51"	36"	40 - 70	SD65mm	1 x 160V	3250 lbs.	15 - 40 t	\$49,990
BH80EXC-1 SDV	71"	56"	38 - 50	SD65mm	1 x 107V	3950 lbs.	20 - 40 t	\$54,990
BH80EXC-2-3-SDV**	71"	56"	50 - 75	SD65mm	1 x 160V	4100 lbs.	20 - 40 t	\$61,690
BH80EXC-4-SDV**	71"	56"	50 - 105	SD65mm	2 x 107V	4050 lbs.	20 - 40 t	\$68,890
BH80EXC-5SDV	71"	56"	80-105	SD65mm	2x160V	4300 lbs.	20 - 40 t	\$72,590
BH200EXCXD-2-SDV**	77"	59"	50 - 75	SD90mm	1 x 160V	5400 lbs.	20 - 40 t	\$66,190
BH200EXCXD-3-SDV**	77"	59"	50 - 105	SD90mm	2 x 107V	5375 lbs.	20 - 40 t	\$73,190
BH200EXCXD-4-SDV**	77"	59"	100-150	SD90mm	2 x 160V	5500 lbs.	20 - 40 t	\$77,290

Notes:

1. Maximum flow is based on 6000 PSI operating pressure. Consult factory for custom configurations.
2. Hydraulic horse power should not exceed maximum rated horse power. $(\text{GPM} \times \text{PSI}) / 1714 = \text{HYD HP}$
3. Models ending in "V" denote variable displacement motor.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained 1/2" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Bull Hog® Excavator Options

Factory Installed Options: (add to mulcher pricing)	
DCR Rotor w/ Viking Axe only for CEM36	\$1,990
DCR Rotor w/ Viking Axe only for BH40, BH47	\$2,490
DCR Rotor w/ Viking Axe only for BH62EXC	\$2,990
DCR Rotor w/ Viking Axe only for BH80EXC	\$3,190
DCR Rotor w/ Viking Axe only for BH200EXC	\$3,590
Thumb Receiver: BH40 & BH80 - Severe duty models only. Use existing excavator thumb to pick up and move logs, rocks, and debris.	\$2,290
FMX36 with Carbide Teeth (18 tools upcharge amount) P/N 501-15-006	+\$324
FMX50 with Carbide Teeth (22 tools upcharge amount) P/N 501-15-006	+\$396

Factory Installed Options: (separate line item on the order)		List Price
CEM Thumb Receiver	Rigid end plate angled and reinforced to receive excavators thumb. Use existing excavator thumb in conjunction with this to pick up and move logs, rocks, and debris.	\$1,190
Universal Adaptor Plate	Pins onto riser of head with flat top. Optional mount or quick coupler can be welded.	\$890
Lexan Guarding Kit	15T and up ½" Excavator Cab Forestry Guard P/N 508-06-004	\$2,890
Lexan Guarding Kit	5-12T ½" Excavator Cab Forestry Guard P/N 502-56-002	\$1,790
Lexan Guarding Kit	YANMAR 5-12T ½" Excavator Cab Forestry Guard P/N 502-56-003	\$1,790
12-50 Ton Mount	Mount specs determine part number for mount.	\$2,890
CEM36 Mount	Mount specs determine part number for mount.	\$1,690
FMX Mount	Mount specs determine part number for mount.	\$1,390
Non-Standard Mount	Excavators that require non-standard mounts may require an upcharge	Call for Price

Optional Deduction: (within top level part number)	
12-50 Ton Mount deduction from list price	(\$1,990)
CEM36 Mount deduction from list price	(\$750)
FMX Mount deduction from list price	(\$650)

Notes:

- t = Metric Ton
- Actual weights will vary based on motor, mount and options selected.
- FMX and CEM36 weight includes typical mount. All other models do not reflect weight of mount. Mounts can average 350 lbs. Quick Attach mounts for excavators over 25 tons can weigh significantly more.
- Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade prices.
- *CEM36 55cc variable displacement motor affords shift benefit up to 24gpm. Flows from 25-30 gpm operate at full displacement.
- **Designates mulching attachment capability of adding the CEM thumb receiver option.
- *** Common excavator suggestions are preliminary; always consult your excavator's actual lifting capacity.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Power Packs

Model	Description	Hydraulic Flow	Weight	List Price
BHP-270 Tier IV	270hp Cummins	105 gpm	10,815lbs / 4905kgs	\$137,290

BHP270 20 ton & up
BH80EXC-4SDV
BH80EXC-5SDV
BH200XD-3SDV
BH200XD-4SDV
SH360-100

Notes:

1. Refer to Bull Hog® and Stump Hog® price pages for excavator attachment pricing.
2. Bull Hog® Excavator and BHP prices do not include installation, line groups or excavator guarding.
3. Completed Fecon® data forms are required to keep the project on schedule and to help streamline installation.
4. Always consider the weight of the attachment with the carrier.
5. Additional counterweight may be required for BHP installation on some excavators. Consult your Fecon® representative for pricing and applications.



Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPS & FOPs, meet your job safety requirements.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Bull Hog® Tooling

Rotor Type	Tool Description	Part Number	Additions or Deductions to Convert Rotor from Standard Tools				
HDT	Standard Double Carbide HDT Tool	BH46HDT01A	Tool Quantity in Head				
HDT	Chipper Knife Holder, HDT	BH46HM017					
HDT	Chipper Knife	BH46HM028.02	18	24	30	36	48
HDT	Chipper Knife & Holder Assembly, HDT	N/A	-	-	-	-	-
HDT	Single Carbide HDT Tool	BH46HDT02A	-\$101	-\$135	-\$169	-\$203	-\$271
HDT	Stone/Rock HDT Tool	BH46HDT03A	+\$296	+\$395	+\$494	+\$593	+\$791
HDT	Rotorvator Tool (Soil Hog)	BH46HDT04V	+\$296	+\$395	+\$494	+\$593	+\$791
FGT	Tool, FGT Standard Duty	320-15-012	-	-	-	-	-
FGT	Viking Axe	320-14-213	-\$832	-\$1,110	-\$1,387	-\$1,665	-\$2,220
FGT	Viking Sword	320-14-212	-\$832	-\$1,110	-\$1,387	-\$1,665	-\$2,220
FGT	Tool, FGT Severe Duty	320-15-011	+\$572	+\$763	+\$954	+\$1,145	+\$1,527
FGT	Tool, Stone	320-15-013	+\$572	+\$763	+\$954	+\$1,145	+\$1,527
FMX36 with Carbide Teeth (18 tools upcharge amount) P/N 501-15-006					+\$324		
FMX50 with Carbide Teeth (22 tools upcharge amount) P/N 501-15-006					+\$396		

FGT					DCR					HDT				
														
No. of Tools per Rotor	BH62	BH74	BH85	BH99	BH120	BH200	BH300	BH350	CEM36	BH 40EXC	BH 47EXC	BH 62EXC	BH 80EXC	BH 200EXC
FGT	24	30	30	48	48	48	48	48	18	18	18	24	30	36
DCR	24	30	36	n/a	42	41	48	n/a	18	16	16	24	30	28
HDT	24	30	36	48	48	48	48	n/a	18	18	18	24	30	30

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® FTX150 & FTX150R

Description	List Price
FTX150 base machine with 20" single grouser tracks	\$211,250
FTX150 base machine with Fecon mulcher combo discount(*)(**)	\$189,990
FTX150R base machine	\$225,250
FTX150R base machine with Fecon mulcher combo discount(*)(**)	\$203,990

FTX150 – Specifications



Specifications	
Engine	Cummins QSB4.5 Tier 4f
Horse Power	140 hp / 104KW
Ground Pressure with Bull Hog	3.7 psi / 26 kpa
Weight with Bull Hog	18,589lbs / 8431kg
Fuel Consumption	5 - 6 gph / 20-24 lph
Implement Drive	5000psi/60gpm 345bar/227lpm
Reversing Fan	Engine & Hydraulic Cooler

FTX150R – Differing Specifications

Specifications	
Ground Pressure with Bull Hog	4.6 psi / 31 kpa
Weight with Bull Hog	19,620lbs / 8,899kg

FTX150 & 150R – Factory Installed Options

Part Number	Description	List Price
FTX150(or FTX150R)-OPT-001	15,000 Line Pull Hydraulic Winch	\$ 8,990
FTX150(or FTX150R)-OPT-002	Auxiliary Engine and Hydraulic Heater	\$ 8,290
FTX150(or FTX150R)-OPT-003	Remote Pressure Adjustment (in Cab)	\$ 1,790
FTX150(or FTX150R)-OPT-004	Severe Duty HVAC Pre-Cleaner	\$ 2,390
FTX150(or FTX150R)-OPT-005	Positive Air Shut Off Valve Factory Installed	\$ 3,290
FTX150(or FTX150R)-OPT-006	CE certification	\$ 1,490
FTX150(or FTX150R)-OPT-007	Fire Suppression System Ansul Wet	\$7,990
Ref Tractor Part #	20" Triple Grouser Track Shoes	\$2,875

FTX150 & 150R – Attachments and Attachment Options

Model	Description	List Price
BH85SD-4	BH85SD w/ 160 Variable Speed Motor	\$44,290
FBSD1500	Dual Acting Tree Shear	\$18,390
FRG72	Root Grapple 72"	\$4,090
FBG72	Grapple Bucket 72"	\$4,390
FFG60HD	Front Rotating Grapple 60" w/o Winch	\$12,490

Notes:

1. *Only available when sold with a BH85SD-4 head attached.
2. ** Cannot be combined with any other special offers.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® FTX200

Description	List Price
FTX200 base machine with 24" single grouser tracks and RK8620 (FGT Rotor)	\$298,990

FTX200 – Specifications

Specifications	
Engine	Cummins B4.5 Stage 5
Horse Power	200 hp / 149KW
Ground Pressure with Bull Hog	4.2 psi / 28.9 kpa
Weight with Bull Hog	26,714lbs / 12117kg
Fuel Consumption	6-7 gph / 28-30 lph
Length of Tractor w/Bull Hog	234" / 6054mm
Width of Tractor w/Bull Hog	101" / 2565mm

FTX200– Factory Installed Options

Part Number	Description	List Price
FTX200-OPT-001	15,000 Line Pull Hydraulic Winch	\$8,990
FTX200-OPT-002	Auxiliary Engine and Hydraulic Heater	\$8,290
FTX200-OPT-004	Severe Duty HVAC Pre-Cleaner	\$2,490
FTX200-OPT-005	Positive Air Shut Off Valve Factory Installed	\$3,290
FTX200-OPT-006	CE certification	\$1,490
FTX200-OPT-007	Fire Suppression System Ansul Wet	\$7,990

RK8620– Factory Installed Options

Description	List Price
RK8620 with DCR Rotor	\$5,490

Notes:

1. RK8620 comes standard with hydraulic push bar and trap door.
2. Options on Bull Hog may require additional valve and hose kit.



Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® FTX300

Description	List Price
FTX300 base machine with 30" single grouser tracks	\$419,930
FTX300 base machine base machine with Fecon mulcher combo discount(*)	\$392,930

FTX300 – Specifications



Specifications	
Engine	Cummins B6.7 Tier IV Stage 5
Horse Power	310 hp/ 231 KW
Ground Pressure with Bull Hog	3.9 psi / 26 kpa
Weight with Bull Hog and winch	31,150 lb / 14,129 kg
Fuel Consumption	8-12 gph 30-45 lph
Implement Drive	5400psi / 115gpm 372bar / 435lpm
Reversing Fan	Engine and Hydraulic

FTX300 – Factory Installed Options

Part Number	Description	List Price
FTX300-OPT-001	Aux Engine and Hyd heater option & Auxiliary Battery Group (4 Batteries for Severe Cold Climate)	\$9,290
FTX300-OPT-003	Positive Air Shut Down Option	\$4,990
FTX300-OPT-004	Thick Windshield 1.25"	\$6,990
FTX300-OPT-005	Front Lights Protection Group (wo/Front Screen Only)	\$990
FTX300-OPT-006	Side Mounted Mirrors	\$1,690
FTX300-OPT-007	Fire Suppression System (Basic Manual System)	\$8,990
FTX300 Winch	15,000lb Capacity	Standard

FTX300 – Attachments

Model	Description	List Price
FTX300-RK8620 (FGT Rotor)	RK8620 Bull Hog with 2 X 160cc Variable Speed Motors- Push bar and trap door included	\$79,990

Note: *Only available when sold with the RK8620 head attached.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Stump Hogs

Grind stumps with extreme mobility using compact track loaders or skid steers or work large areas and difficult slopes with an excavator mounted stump grinder. Fecon's SH270 is the ideal Stump Hog for high flow skid steers. The SH360 Excavator Stumper mounts to any 20+Ton excavators via a bolt-on mount. Custom fit to your specific excavator. Hydraulics and drive train can be set up for the power provided by the excavator in the 40-65gpm range and up to 5500psi. For ultimate performance the SH360 can also be set up to operate on BHP270 self-contained Powerpacks with Fecon Power Management that deliver 105gpm.



Fecon® Stump Hog

Model	Hydraulic HP	Flow @ PSI	Wheel Diameter	Wheel # of Tools	Sweep	Weight	List Price
SH270*	70-100	30-50 gpm @ 4100 psi	25"	24	60"	1700 lbs.	\$19,290

Note: Mount and Hoses included

Fecon® Excavator Stump Hog

Model	Wheel Diameter	Wheel # of Tools	Weight	Motor	Flow	Hoses	List Price
SH360-45	36"	15	2500 lbs.	150 cc	40-50	No	\$41,490
SH360-61	36"	15	2500 lbs.	150 cc	50-64	No	\$41,490
SH360-100	36"	15	2600 lbs.	250 cc	95-105	No	\$43,990

Note: *Cab controller is included.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.


Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Stumpex

The Fecon Stumpex stump grinder mounts to excavators and skid steers, with as little as 20 gpm hydraulic output. The Stumpex low RPM and 33,600 ft. per lb. of torque enables it to draw itself down into any species of stump. The Stumpex can grind stumps 8" – 28" in diameter and up to 20" deep in a single pass. Larger diameter stumps are processed by making additional passes. A threaded replaceable cone and staggered AR500 cutting blades grind out stump and root material with minimal discharge. Low maintenance costs, high production, and less clean-up make the Stumpex a great tool for stump grinding contractors in land clearing, tree care, and municipal applications.

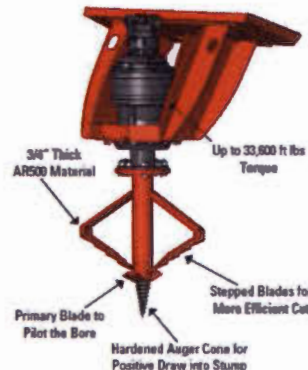

Flow GPM	Speed RPM	Depth /Min 3/4" Bit
20	7.3	5.5"
24	8.8	6.6"
28	10.2	7.7"
32	11.7	8.8"
36	13.1	9.8"
40	14.7	11"
42	16.1	12.1"

Fecon® Stumpex

Model	Mount	Bit Diameter	Weight	Class	Flow Required	List Price
SHX33SX	SS/CTL QA	32"	1,368 lbs.	SS / CTL	20 - 42 gpm	\$19,990
EXC Mount Adder for SHX33SX	EXC	32"	Weight of mount	8-12 Ton	20 -42 gpm	\$2,000
SHX34EXC	EXC	32"	2,000 lbs. +mount	12-20 Ton	40-65 gpm	\$29,990
SHX12 <i>Coming Q4, 2020</i>	Common Industry Interface / Bobcat Mini BobTach	12"	400 lbs.*	CUL / Mini Skid Steer	10 -20 gpm	\$9,990

Placing Stumpex Orders:

- Skid Steers – Model must be noted on order to receive correct hoses and connections
- Excavators – Mount data sheet must be completed and submitted for order to be processed
- SS & Exc – Mount data sheet and SS model noted on order to receive SS hoses and Exc mount

Notes:

1. SHX33SX rated at 4,250 PSI and SHX34EXC rated up to 5,800 PSI
2. Stumpex requires case drain and reversible flow
3. Excavator mounts will vary the weights shown
4. * This is the weight of the base unit and mount. Does not include weight of bolts on options

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Deck Mulcher (FDM)

The Fecon Deck Mulcher, available in 3 cutting widths for skid steers and compact track loaders with flow ranges from 17-41gpm is an excellent tool for vegetation management. The dual sided blades and the ability to cut 10" trees and mulch up to 4" vegetation continuously ensure maximum productivity. The dual sided blades and heavy-duty carrier bearing ensure long life and durability.



Fecon® Deck Mulcher Models

Model	Weight	Cut Width	Overall Width	List Price
FDM62	1950 lbs.	62"	69"	\$10,790
FDM74	2150 lbs.	74"	81"	\$12,490
FDM86	2450 lbs.	86"	93"	\$13,490

4 MOTOR OPTIONS COVERING THE BELOW FLOW RANGES. AVAILABLE ON ANY SIZE DECK MULCHER.

- 17-20gpm
- 21-28gpm
- 29-34gpm
- 35-41gpm



Note: Hoses must be reversed to switch direction of blades

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained 1/2" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Tree Shears

Fecon® offers a Dual Knife (FBS1200 and FBS1500) Tree Shears for Skid Steers. Featuring strong light weight frames, fitted with adjustable AR400 steel knives. Order the excavator conversion kit to mount the 1200-1500 on smaller excavators(7-12T). The FBS1600 is a dedicated excavator model. Fecon® also offers the FRS line of rotating excavator tree shears. For excavators between 4.5 and 35 T. Shear, stack and load chippers with 360° rotation.



Fecon® Skid Steer Tree Shear Pricing

Model	Weight	Max. Diameter	Flow Required	List Price
FBS1200SS – Dual Acting*	1250 lbs.	12"	15-20 gpm	\$13,990
FBSD1500SS – Dual Acting*	1900 lbs.	15"	15-23 gpm	\$17,390
FBS1200SS-BC - Bobcat	1250 lbs.	12"	15-20 gpm	\$15,290
FBSD1500SS-BC - Bobcat	1900 lbs.	15"	15-23 gpm	\$17,990

Fecon® Excavator Tree Shear Pricing

Model	Weight	Excavator Size	Max. Diameter	Flow Required	List Price
FBS1600EXC***	3700 lbs	12-16 ton	16"	15-35 gpm	\$30,990

Excavator Tree Shear Kit	Weight	Description	List Price
Conversion Kit - SS to EXC	200 lbs.	Includes bolt-on mount specific to the excavator. (7-10 ton)/ FBS1500SS (8-12 ton) universal mounts. Also includes 24V diverter valve required for excavator application.	\$3,320

Notes:

1. *Skid steer shears include 12V diverter valve for switch between grabber and accumulator function
2. *** Includes bolt-on mount.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Rotating Excavator Tree Shears (FRS)

Model	Excavator Size	Weight	Cut Capacity	List Price
FRS04 with Rotator * requires 2 lines group * accumulator not available	5.5 – 9 T	950lbs	6"	\$21,690
FRS05 with Rotator & Accumulator * requires 2 lines groups	8 – 14 T	1332lbs	10"	\$31,990

FRS10 (12-18T Excavators)

FRS10 Configurations 14" cutting capacity	Weight	List Price
with accumulator and rotator * requires 2 lines groups and electric	2400lbs	\$41,990
no accumulator or rotator *1 lines group needed		\$29,990
with accumulator without rotator *. requires 1 lines group, no electric		\$34,890
with rotator without accumulator * requires 2 lines groups		\$39,390

FRS15 (16-24T Excavators)

FRS15 Configurations 18" cutting capacity	Weight	List Price
with accumulator and rotator * requires 2 lines groups and electric	3660lbs	\$55,990
no accumulator or rotator *1 lines group needed		\$42,990
with accumulator without rotator *. requires 1 lines group, no electric		\$47,890
with rotator without accumulator * requires 2 lines groups		\$52,390

FRS20 (21-35T Excavators)

FRS20 Configurations 20" cutting capacity	Weight	List Price
with accumulator and rotator * requires 2 lines groups and electric	4545lbs	\$78,900
no accumulator or rotator *1 lines group needed		\$66,390
with accumulator without rotator * requires 1 lines group, no electric		\$71,290
with rotator without accumulator * requires 2 lines groups		\$76,690



Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Grapple Pricing

Fecon® offers two different lines of Grapples to fit your skid steers and tracked carriers. Grapples are the perfect forestry attachment for tree care and landscaping applications.



Fecon® Skid Steer Grapple Rake/ Bucket Pricing

The Rake Grapple was designed with a rigid frame and serrated AR400 front tines for ripping and grabbing. This grapple is excellent for clearing brush and removing debris and logs. The 41" depth, 72" length and 37" open clamp height make this grapple perfect for grabbing and holding awkward shaped material.

Model	Weight	Width	List Price
FRG72	863 lbs.	72"	\$4,090
FBG72	850 lbs.	72"	\$4,390

Fecon® Skid Steer Front Rotating Grapple Pricing

The Front Grapple is perfect for brush and tree transporting or loading and placing logs and rocks with a skid steer. All models include 360° rotation and have options for grapple openings of 52", 60" or 72".

Model	Description	Weight	Lift Capacity	List Price
FFG52LD-BC (Light Duty Bobcat Set up)	48" light duty plate & 52" grapple	850lbs	6,600 lbs.	\$10,790
FFG52LD (Light Duty)	48" light duty plate & 52" grapple	850lbs	6,600 lbs.	\$9,290
FFG60LD (Light Duty)	48" light duty plate & 60" grapple	940lbs	9,900 lbs.	\$9,690
FFG60HD (Heavy Duty)	60" heavy duty plate & 60" grapple	1070lbs	9,900 lbs.	\$12,490
FFG60HD-BC (Heavy Duty Bobcat Set up)	60" heavy duty plate & 60" grapple	1070lbs	9,900 lbs.	\$14,490
FFG72HD (Heavy Duty)	60" heavy duty plate & 72" grapple	1300lbs	9,900 lbs.	\$16,990

Winch Option:	Capacity	Cable	List Price
FGW1000*	12,000 lbs.	3/8 x 100	\$6,125

Note: *FGW1000 fits all skid steer front grapples.

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained 1/2" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Milling Attachment Pricing

Fecon Milling Attachments are well suited to milling compacted soil, stumps, and roots, or to blend in stabilizing materials or additives to improve the soil. The Soil Hogs can also be used to fell and incorporate standing trees into the ground if desired. The soil hog is ideal for converting land back into tillable acres for alternative crops, cleaning up tree lines or windbreaks.

Rotor diameters range from 28"-40" and can mill 12"-20" deep, leaving a homogeneous mix of organic material in a light well aerated condition. PTO models are available at 110 to 440 horse power. The hydraulic powered FMA8039 can run from 400-600HP. Rotor direction can be configured to the type of carrier, primary direction of operation, and desired results. PTO models include an overrunning slip clutch and synchronized pivoting gear box that allow a broad range of motion to operate smoothly at various depths. The carbide tools effectively process wood and soil.



Model	Work Width IN/MM	Max Width IN/MM	Tool Qty	Max Depth IN/MM	Exposed Rotor Depth IN/MM	Weight LBs/KG	HP Type	Min HP	Max HP	List Price
FMA8039BH-2*	80/2000	112/2510	60	20/500	10/255	11900/4825	Hyd	300	600	\$129,990
FMA8039BP	80/2000	112/2510	60	20/500	10/255	11900/4825	PTO	200	440	\$118,990
FMA8032 PTO	80/2000	98/2490	48	16/400	9/225	8050/3650	PTO	180	300	\$103,990
FMA8028 PTO	80/2000	-	48	12/300	7.5/190	5950/2900	PTO	140	190	\$64,990
FMA9032H*	80/2000	97/2464	56	12/300	8 /205	8076/3663	Hyd	TBD	290	\$99,990

Notes:

1. Compact roller standard, except FMA8039BH-2 no roller available
2. PTO models require 1000 RPM PTO input speed.
3. * Debris door Standard on these models

Safety is the responsibility of the operator, always ensure your carrier's safety features, including ROPS & FOPs, meet your job safety requirements.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Operator cab must be protected with properly maintained ½" Lexan glass or equal.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.